

nokian[®]
TYRES



**HEAVY TIRE
PRODUCT CATALOGUE 2025**





NOKIAN HEAVY TYRES SUCCESS STORY

MADE IN FINLAND. All our tires are the result of Finnish innovation, research, and product development. All our heavy tires, retreads and wheels are designed and manufactured at our plants in Finland. Our tires for trucks and buses are designed in Finland and produced in EU.

NOKIANTYRES.COM/HEAVY

DESIGNED AND MADE IN FINLAND



ALL OUR HEAVY TIRES, WHEELS AND RETREADING MATERIALS ARE DESIGNED AND MANUFACTURED IN FINLAND.

A WINNING TEAM



~400

NOKIAN HEAVY TIRES PEOPLE

WITH YOU WHERE THE JOB IS DONE



5

SEGMENTS

Forestry, agriculture, on-road, off-the-road and wheels



MODERN OPERATION & TECHNOLOGIES



ISO 9001 | ISO 1400 | ISO 45001

Commitment to quality, sustainability and safety

STATE OF THE ART R&D CENTER IN NOKIA, FINLAND



2

OUTDOOR TESTING CENTERS

SAFETY IS OUR TOP PRIORITY

59 %

WE HAVE CUT OUR LOST TIME ACCIDENT FREQUENCY (LT1F) BY NEARLY 60% IN 4 YEARS

IN TOP 1% OF COMPANIES ASSESSED BY ECOVADIS

PLATINUM RATING



WELCOME TO THE WORLD OF HEAVY TIRES

TABLE OF CONTENTS

SUCCESS STORY	2	NOKIAN TYRES ARMOR GARD 2	29
COMING SOON	4		
FORESTRY	5	EARTHMOVING AND ROAD MAINTENANCE	30
NOKIAN TYRES FOREST KING F2.....	5	NOKIAN TYRES ARMOR GARD 2	30
NOKIAN TYRES FOREST KING TRS 2.....	6	NOKIAN TYRES EXCAVATOR.....	30
NOKIAN TYRES FOREST KING TRS 2+	7	NOKIAN TYRES GROUND KARE	31
NOKIAN TYRES FOREST KING TRS L-2.....	7	NOKIAN TYRES GROUND KARE SEMI-SLICK	31
NOKIAN TYRES NORDMAN FOREST ELS L-2	8	NOKIAN TYRES GROUND KING LOADER	32
NOKIAN TYRES NORDMAN FOREST F.....	8	NOKIAN TYRES HAKKAPELIITTA LOADER.....	32
NOKIAN TYRES NORDMAN FOREST TRS L-2	9	NOKIAN TYRES LOADER GRIP	33
NOKIAN TYRES FOREST KING T	9	NOKIAN TYRES LOADER GRIP 2	33
NOKIAN TYRES TR FOREST 2	10		
NOKIAN TYRES TR MULTIPLUS	11	ALL-TERRAIN TRUCKS AND MILITARY VEHICLES	34
NOKIAN TYRES TRACTOR KING	12	NOKIAN TYRES MPT AGILE	34
NOKIAN TYRES FOREST KING TRS LS-2.....	13	NOKIAN TYRES MPT AGILE 2	34
NOKIAN TYRES LOGGER KING LS-2.....	13		
NOKIAN TYRES LOGGER KING LS-2 EXTREME.....	14	ACCESSORIES	35
		LOAD CAPACITY (LI), SPEED INDEX (SI) AND RECYCLING	37
AGRICULTURAL AND CONTRACTING	15	NOKIAN TYRES INTUITU™ - SMART TIRES	39
NOKIAN TYRES COUNTRY KING.....	15		
NOKIAN TYRES CT	16		
NOKIAN TYRES ELS.....	16		
NOKIAN TYRES FLOAT KING VF.....	17		
NOKIAN TYRES TR MULTIPLUS	17		
NOKIAN TYRES GROUND KING	18		
NOKIAN TYRES HAKKAPELIITTA TRI.....	19		
NOKIAN TYRES SOIL KING VF	20		
NOKIAN TYRES TRI 2.....	21		
NOKIAN TYRES TRI STEEL	22		
UNDERGROUND MINING	23		
NOKIAN TYRES ARMOR GARD 2 MINE	23		
NOKIAN TYRES MINE KING E-4	23		
NOKIAN TYRES NORDMAN MINE E-4.....	24		
NOKIAN TYRES MINE KING L-5S.....	24		
NOKIAN TYRES MINE L-3S	25		
PORTS AND TERMINALS	26		
NOKIAN TYRES ARMOR GARD	26		
NOKIAN TYRES HTS G2 E-4	26		
NOKIAN TYRES HTS G2 L-4S.....	27		
NOKIAN TYRES HTS G2 L-5S.....	27		
NOKIAN TYRES RTG	28		
NOKIAN TYRES HTS TUGGER	28		

NOKIAN TYRES FLOAT KING VF

NEXT LEVEL FLOTATION FOR HIGH-CAPACITY AGRICULTURAL TRAILERS AND TANKERS



The Flexforce[®] VF tire technology by Nokian Tyres provides dynamic flexibility and high strength that in unique combination lets you make the most out of the power and capacity at hand.

XXL GROUND CONTACT

UNIQUE TRACTION FLOTATION PATTERN

OPTIMALLY ROUNDED SHOULDERS

CONTINUOUS CENTER-ZONE PATTERN

ADVANCED HIGH FLEX BODY MATERIAL

HIGH STRENGTH STEEL BELT REINFORCEMENTS



FIELD

- ✓ Premium grip performance in challenging soil conditions
- ✓ Crop, top soil damage prevention
- ✓ Reduced soil resistance (bull-dozing)

ROAD

- ✓ Smooth and balanced behaviour
- ✓ Low rolling resistance
- ✓ High load capacity

MORE EFFICIENT, STABLE AND SMOOTH LOAD-CARRYING*

40% Over 40% larger contact on the soil

40% Over 40% less rolling resistance

32 - 42% more load capacity compared to standard radial @ 50KPH



*) Nokian Tyres Float King VF vs. premium standard radial flotation tire

FORESTRY

NOKIAN TYRES FOREST KING F2

TRACK TIRE FOR HARVESTERS AND FORWARDERS

- Protective tread design with strong shoulders gives excellent functionality in track and chain use.
- Strong diagonal structure with steel fortification gives excellent puncture protection. More protective compound in tread and especially in shoulder.
- High load-bearing capacity and comprehensive selection of sizes fills the needs of existing forest machinery – from smallest to heaviest.



Product code	Size	LI/SS	Ply rating	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tread code	Tube product code	Load capacity for forestry service (lt, lb)		Load capacity for road, lb		
														Speed (mph)		Speed (mph)		
														5	12	17.5	25	
T445619	600/50-22.5	159A8 (167A2)	20	AG20.00	23.8	45.9	21.2	139.5	73	80	38	LS-2	T55089	12015	11860	10320	9645	
T445608	710/40-22.5	161A8 (168A2)	20	AG24.00	27.9	45.9	21.1	139.8	73	80	38	LS-2	T55092	12345	12545	10915	10195	
T445572	710/40-24.5	163A8 (170A2)	20	AG24.00	27.5	48.4	22.4	147.2	73	80	44	LS-2	T545448	13230	13215	11495	10750	
T445717	800/40-24.5	169A8 (176A2)	20	AG28.00	30.9	49.2	22.4	149.4	73	80	44	LS-2	T545448	15655	15730	13680	12785	
T445573	600/55-26.5	165A8 (172A2)	20	AG20.00	23.7	52.8	24.3	160.3	73	80	44	LS-2	T55098	13890	13965	12145	11355	
T445571	710/45-26.5	168A8 (175A2)	20	AG24.00	27.8	53	24.5	160.8	73	80	44	LS-2	T55099	15210	15190	13205	12345	
T445589	710/45-26.5	173A8 (180A2)	24	AG24.00	27.9	53	24.4	160.8	87	87	44	LS-2	T55099	17635	17625	15335	14330	
T445800	710/55-26.5	179A8 (186A2)	24	AG24.00	27.4	59.3	27	179.5	87	87	44	LS-2	T55102	20945	21020	18285	17085	
T445574	750/55-26.5	182A8 (189A2)	24	AG24.00	30.3	58	26.5	176.6	87	87	44	LS-2	T55102	23370	23050	20050	18740	
T445603	800/40-26.5	170A8 (177A2)	20	AG28.00	31.8	52.7	24.4	160.8	73	80	44	LS-2	T545312	16095	16270	14155	13230	
T445570	710/55-28.5	180A8 (187A2)	24	AG24.00	28.3	59.6	27.4	181.8	87	87	44	LS-2	T545543	21495	21695	18870	17635	
T445537	780/50-28.5	182A8 (190A2)	24	AG26.00	30.8	59.6	27.4	181.8	87	87	44	LS-2	T545543	23370	23050	20050	18740	
T445584	780/55-30.5	187A8 (195A2)	24	AG26.00	30.7	64.2	29.3	195.8	87	87	44		T55891	26785	26445	23005	21495	



NOKIANTYRES.COM/FORESTKINGF2



NOKIAN TYRES FOREST KING TRS 2

TRACTION TIRE FOR HARVESTERS AND FORWARDERS

- Aggressive tread design, square shape, sharp shoulders and high tread depth provide superb traction and lateral grip.
- Wide lug ends, lifted groove bottom in shoulder and considered pitch length give good performance in track and chain use.
- Strong diagonal structure with steel fortification gives excellent puncture protection. More protective compound on shoulders.



Product code	Size	LI/SS	Ply rating	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tread code	Tube product code	Load capacity for forestry service (lt, lb)		Load capacity for road, lb	
														Speed (mph)		Speed (mph)	
														5	12	17.5	25
T445618	600/50-22.5	159A8 (167A2)	20	AG20.00	23.5	46	21	139.8	73	80	53	LS-2	T55089	12015	11860	10320	9645
T445607	710/40-22.5	161A8 (168A2)	20	AG24.00	27.8	46.1	21.1	140.5	73	80	53	LS-2	T55092	12345	12545	10915	10195
T445639	600/50-24.5	164A8 (171A2)	20	AG20.00	23.7	48.4	22.3	147.2	80	80	60	LS-2	T545447	12345	12205	10615	9920
T445568	710/40-24.5	163A8 (170A2)	20	AG24.00	27.3	48.5	22.4	147.9	73	80	60	LS-2	T545448	13230	13215	11495	10750
T445718	800/40-24.5	169A8 (176A2)	20	AG28.00	30.9	49.3	22.3	149.9	73	80	60	LS-2	T545448	15655	15730	13680	12785
T445567	600/55-26.5	165A8 (172A2)	20	AG20.00	23.5	53	24.4	161.3	73	80	60	LS-2	T55098	13890	13965	12145	11355
T445640	710/45-26.5	173A8 (180A2)	24	AG24.00	27.6	53	24.3	162	87	87	60	LS-2	T55099	17635	17625	15335	14330
T445566	710/45-26.5	168A8 (175A2)	20	AG24.00	27.6	53	24.3	161.5	73	80	60	LS-2	T55099	15210	15190	13205	12345
T445801	710/55-26.5	179A8 (186A2)	24	AG24.00	27.4	59.2	27.1	179	87	87	62	LS-2	T55102	20945	21020	18285	17085
T445602	750/55-26.5	182A8 (189A2)	24	AG24.00	29.7	58.1	26.5	177.1	87	87	62	LS-2	T55102	23370	23050	20050	18740
T445594	800/40-26.5	170A8 (177A2)	20	AG28.00	31.4	52.9	24.4	161.3	73	80	60	LS-2	T545312	16095	16270	14155	13230
T445612	710/55-28.5	180A8 (187A2)	24	AG24.00	28	59.6	27.3	181.8	87	87	62	LS-2	T545543	21495	21695	18870	17635
T445581	780/50-28.5	182A8 (190A2)	24	AG26.00	30.8	59.6	27.2	181.5	87	87	62	LS-2	T545543	23370	23050	20050	18740



NOKIANTYRES.COM/FORESTKINGTRS2



NOKIAN TYRES FOREST KING TRS 2+

TRACTION TIRE FOR 6WD HARVESTERS AND FORWARDERS

- Aggressive tread design, square shape, sharp shoulders and high tread depth provide superb traction and lateral grip
- Special tread design with extra wing bars give excellent support, traction and protection in chain and wheel track use
- Strong 24PR diagonal structure with steel fortification gives excellent puncture protection and impressive stability



Product code	Size	LI/SS	Ply rating	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tread code	Tube product code	Load capacity for forestry service (lt), lb		Load capacity for road, lb				
														Speed (mph)		Speed (mph)				
														5	5	12	17.5	25	30	
T445714	600/65-34	169A8 (176A2)	24	DW20B	24.2	64.5	29.3	195.4	58	58	63	LS-2	T55394	15655	19180	15730	13680	12785	11640	
T445715	710/55-34	173A8 (180A2)	24	DW24B	28.1	64.3	29.1	195.2	58	58	63	LS-2	T55394	17635	21495	17625	15335	14330	13040	
T445716	710/70-34	181A8 (188A2)	24	DW23B	29.3	72.2	32.3	218.7	58	58	67	LS-2	T55388	22045	27280	22375	19465	18190	16555	



CCR



CHAIN USE



DIAGONAL



PUNCTURE PROTECTION



STEEL FORTIFIED



TRACK USE



TUBE TYPE



[NOKIANTYRES.COM/FORESTKINGTRS2PLUS](https://www.nokiantyres.com/forestkingtrs2plus)

NOKIAN TYRES FOREST KING TRS L-2

RELIABLE GRIP AND TRACTION

- Wide and high pattern lugs for good mobility and operating comfort
- Optimised lug angle and sharp tire shoulders providing excellent lateral grip
- Steel protection against punctures



Product code	Size	LI/SS	Ply rating	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tread code	Tube product code	Load capacity for forestry service (lt), lb		Load capacity for road, lb		
														Speed (mph)		Speed (mph)		
														5	5	12	17.5	25
T445395	650/60-26.5	172A8 (179A2)	20	AG20.00	25.8	58.2	26.6	175.9	73	80	63	L-2	T55102	17085	17085	14860	13890	



CCR



CHAIN USE



DIAGONAL



PUNCTURE PROTECTION



STEEL FORTIFIED



TRACK USE



TUBE TYPE



[NOKIANTYRES.COM/FORESTKINGTRSL2](https://www.nokiantyres.com/forestkingtrsl2)



NOKIAN TYRES NORDMAN FOREST ELS L-2

COST-EFFICIENT REPLACEMENT TIRE FOR HARVESTERS AND FORWARDERS

- Strong and reliable diagonal structure with steel fortification gives excellent puncture protection in demanding forestry conditions.
- The existing tracks designed for Forest King ELS L-2 are applicable to Nordman Forest ELS L-2, making it a perfect option as a replacement tire.
- The design of the tire provides good performance in track and chain use.



Product code	Size	LI/SS	Ply rating	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tread code	Tube product code	Load capacity for forestry service (lt, lb)			Load capacity for road, lb			
														Speed (mph)			Speed (mph)			
														5	12	17.5	25			
T445623	600/50-22.5	149A8 (156A2)	16	AG20.00	23.9	45.8	21.4	139.5	46	58	40	LS-2	T55089	8820	8820	7670	7165			



CCR



CHAIN USE



DIAGONAL



PUNCTURE PROTECTION



STEEL FORTIFIED



TRACK USE



TUBE TYPE



NOKIANTYRES.COM/NORDMANFORESTELSL2

NOKIAN TYRES NORDMAN FOREST F

COST-EFFICIENT REPLACEMENT TIRE FOR HARVESTERS AND FORWARDERS

- Strong and reliable diagonal structure with steel fortification gives excellent puncture protection in demanding forestry conditions.
- The design of the tire provides good performance in track and chain use.



Product code	Size	LI/SS	Ply rating	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tread code	Tube product code	Load capacity for forestry service (lt, lb)			Load capacity for road, lb			
														Speed (mph)			Speed (mph)			
														5	12	17.5	25			
T445625	710/40-22.5	151A8 (158A2)	16	AG24.00	27.6	45.8	21.2	139.5	46	58	35	LS-2	T55092	9370	9360	8135	7605			
T445599	710/40-24.5	163A8 (170A2)	20	AG24.00	27.8	48.1	22.6	146.8	73	80	37	LS-2	T545448	13230	13215	11495	10750			
T445598	600/55-26.5	165A8 (172A2)	20	AG20.00	24.2	52.7	24.6	160	73	80	40	LS-2	T55098	13890	13965	12145	11355			
T445565	710/45-26.5	168A8 (175A2)	20	AG24.00	28	53	24.5	159.3	73	80	38	LS-2	T55099	15210	15190	13205	12345			
T445597	750/55-26.5	177A8 (184A2)	20	AG24.00	30	58.1	26.8	175.9	73	80	40	LS-2	T55102	19840	19800	17220	16095			



CCR



CHAIN USE



DIAGONAL



PUNCTURE PROTECTION



STEEL FORTIFIED



TRACK USE



TUBE TYPE



NOKIANTYRES.COM/NORDMANFORESTF



NOKIAN TYRES TR FOREST 2

FOR SMALL AND MEDIUM SIZE TRACTORS USED IN VERSATILE TASKS F.EX IN FORESTRY

- Cut and crack resistant compound together with strong cross-ply construction to tolerate rough conditions.
- Stiff diagonal construction enables great stability.
- Tractive tread design with good self-cleaning properties.



Product code	Size	LI/SS	Ply rating	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	SRI	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tread code	Load capacity for tractor, lb					
														15	17.5	22.5	25	27.5	30
T445784	320/85-24	130A8 (127B)	16	DW11	12.8	46.2	20.8	139.1	550	41	41	45	R-1	4650	4485	4310	4190	4025	3815
T445780	340/85-24	134A8 (131B)	16	DW12	13.7	48.1	21.7	145	575	41	41	48	R-1	5190	5005	4815	4675	4485	4255
T445778	380/85-24	140A8 (137B)	16	DW13	15.4	49.8	22.3	150.1	600	41	41	53	R-1	6120	5895	5675	5510	5290	5015
T445785	340/85-28	136A8 (133B)	16	DW12	13.9	51.5	23.3	155.4	625	41	41	53	R-1	5480	5280	5080	4940	4740	4495
T445790	380/85-28	142A8 (139B)	16	DW13	15.4	53.5	24.1	161.7	650	41	41	53	R-1	6480	6250	6020	5840	5610	5315
T445789	420/85-28	148A8 (145B)	16	DW15L	17.1	56	25.2	169.7	675	41	41	58	R-1	7705	7430	7155	6945	6670	6315
T445786	420/85-30	149A8 (146B)	16	DW15L	16.9	58.7	26.3	176.5	700	41	41	59	R-1	7960	7670	7385	7165	6880	6525
T445779	420/85-34	151A8 (148B)	16	DW15L	16.9	62.1	27.8	186.8	750	41	41	59	R-1	8445	8135	7835	7605	7295	6925
T445777	460/85-34	155A8 (152B)	16	DW16L	18.3	64.5	29.8	194.9	775	41	41	63	R-1	9480	9140	8795	8545	8200	7770
T445793	420/85-38	152A8 (149B)	16	DW15L	17	65.9	29.9	200	800	41	41	63	R-1	8685	8380	8060	7825	7520	7120
T445788	460/85-38	157A8 (154B)	16	DW16L	18.5	68.5	30.9	207.4	825	41	41	67	R-1	10095	9735	9370	9095	8730	8280
T445787	520/85-38	164A8 (160B)	16	DW18L	21.1	72.1	32.2	217.5	875	41	41	68	R-1	12235	11795	11355	11025	10580	10030



NOKIANTYRES.COM/TRFOREST2



NOKIAN TYRES TR MULTIPLUS

FOR TRACTORS USED IN VERSATILE CONDITIONS LIKE FORESTRY, AGRICULTURAL WORK AND ROAD TRANSPORTS

- Radial construction forms wide footprint together with deep and open tread design, enabling excellent traction properties.
- Radial construction enables durability and good driving properties in road transports.
- Strengthened sidewalls enable use in conditions where punctures and cuts are possible, such as stony fields or forests.



Product code	Size	LI/SS	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	SRI	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tread code	Tube product code	Load capacity for tractor, lb					
														15	17.5	22.5	25	27.5	30
T445410	500/65R24	142A8 (139B)	DW15L	19.3	48.9	22.6	147	600	35	46	60	R-1	T55116	6480	6250	6020	5840	5610	5315
T445411	500/65R28	144A8 (141B)	DW15L	19.3	52.8	24.5	159.6	650	35	46	60	R-1	T55097	6855	6605	6360	6175	5930	5620
T445412	540/65R28	149A8 (146B)	DW16	20.6	55.5	25.7	167.5	675	35	46	64	R-1	T545229	7960	7670	7385	7165	6880	6525
T445413	600/65R34	157A8 (154B)	DW18L	23	64.6	29.5	194.1	775	35	46	66	R-1	T55395	10095	9735	9370	9095	8730	8280
T445414	600/65R38	159A8 (156B)	DW18L	23	68.6	31.9	208.3	825	35	46	66	R-1	T55445	10705	10320	9930	9645	9260	8775
T445415	650/65R38	164A8 (160B)	DW20B	25.2	71.2	33	215.9	875	35	46	67	R-1	T545322	11925	11495	11065	10750	10320	9780



[NOKIANTYRES.COM/TRMULTIPLUS](https://www.nokiantyres.com/TRMULTIPLUS)



NOKIAN TYRES TRACTOR KING

TRACTOR TIRE FOR FORESTRY, EARTHMOVING AND ROAD MAINTENANCE WITH HIGH-SPEED ROAD TRANSITIONS

- Strong steel belted radial carcass strengthened with forest tread compound. 400 kPa max pressure enabling high load carrying capacity and stability.
- Wide tread and radically increased amount of tractive edges for supreme traction.
- Innovative tread design with even ground contact resulting in comfortable drive. Durability up to 65 km/h speeds.



Product code	Size	LI/SS	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	SRI	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tread code	Load capacity for tractor, lb					
													Speed (mph)					
													25	27.5	30	35	37.5	40
T445806	480/65R28	148D	DW15L	19.2	53.5	24.8	161.5	650	46	58	60	R-1W	7605	7430	7295	7155	7045	6945
T445673	500/65R28	150D	DW16L	19.4	53.5	24.8	161.5	650	46	58	60	R-1W	8090	7905	7760	7605	7495	7385
T445674	540/65R28	154D	DW18L	21.3	55.5	25.6	167.2	675	46	58	60	R-1W	9050	8850	8685	8520	8390	8265
T445675	600/60R28	157D	DW18L	23	56	24.3	167.5	675	46	58	62	R-1W	9955	9735	9545	9370	9225	9095
T445851	600/65R28	160D	DW20B	23.9	59.1	27.2	178.3	700	46	58	63	R-1W	10870	10615	10415	10220	10075	9920
T445676	540/65R30	155D	DW18L	21.1	57.6	26.7	174.3	700	46	58	62	R-1W	9360	9140	8975	8795	8675	8545
T445677	540/70R30	159D	DW18L	21.4	59.3	27.3	178.7	725	46	58	63	R-1W	10560	10320	10130	9930	9790	9645
T445678	600/70R30	165D	DW18L	22.8	63.1	28.7	190	750	46	58	64	R-1W	12435	12145	11925	11695	11520	11355
T445679	620/75R30	169D	DW20B	24.6	66.5	30.3	200.7	800	46	58	66	R-1	14000	13680	13425	13175	12975	12785
T445680	600/65R34	163D	DW18L	22.9	64.6	29.7	195.3	775	46	58	66	R-1W	11775	11495	11290	11065	10915	10750
T445681	600/70R34	167D	DW18L	23	67	30.5	202.3	800	46	58	66	R-1W	13160	12855	12620	12380	12190	12015
T445682	600/65R38	165D	DW18L	22.8	68.7	31.7	208	825	46	58	67	R-1W	12435	12145	11925	11695	11520	11355
T445683	650/65R38	169D	DW20B	24.9	71.3	32.7	215.7	875	46	58	67	R-1W	14000	13680	13425	13175	12975	12785
T445684	650/75R38	175D	DW20B	25.4	76.5	34.6	232	925	46	58	69	R-1W	16655	16280	15975	15665	15445	15210
T445685	650/85R38	178D	DW20B	25.3	81.3	37	246.9	975	46	58	69	R-1	18110	17690	17360	17030	16790	16535
T445741	710/70R38	177D	DW23B	28.2	77	35	233.1	925	46	58	69	R-1W	17625	17220	16900	16580	16335	16095
T445852	800/70R38	183D	DW27B	32.5	82	37.4	248	975	46	58	71	R-1	21120	20645	20260	19875	19575	19290
T445740	650/65R42	170D	DW20B	24.9	75.3	34.7	228.3	925	46	58	69	R-1W	14485	14155	13890	13625	13425	13230
T445686	710/70R42	179D	DW23B	28.2	81.1	37.1	245.5	975	46	58	71	R-1W	18705	18285	17945	17605	17340	17085
T445687	710/75R42	181D	DW23B	28.2	83.9	38.3	254.3	1000	46	58	72	R-1W	19920	19465	19105	18740	18465	18190



NOKIANTYRES.COM/TRACTORKING



NOKIAN TYRES FOREST KING TRS LS-2

A FORESTRY AND EARTHMOVING MACHINE TRACTION TIRE WITH A STRONG TRACTION BAR AND EXCELLENT GRIP. WELLCLEANING, OPEN-CENTRE TREAD DESIGN. DURABLE SPECIAL RUBBER COMPOUND AND EFFICIENT STEEL FORTIFICATION

- Tires for log skidders, wide tread with high traction lugs
- Special cut and crack resistant compound
- Steel fortification against punctures



Product code	Size	LI/SS	Ply rating	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tread code	Tube product code	Load capacity for log skidder drive wheel for cable and grapple skidders forestry service, lb		Load capacity for log skidder drive wheel (other than on cable or grapple skidder) transport service, lb			
														Speed (mph)		Speed (mph)			
T445516	28L-26	173A6 (185A2)	26	DW25B	29.2	64.6	29.4	194.7	49	58	67	LS-2	T55101	5	20285	10	15	17.5	25
															17195	15765	14330	12895	



[NOKIANTYRES.COM/FORESTKINGTRSLS2](https://www.nokiantyres.com/forestkingtrsls2)

NOKIAN TYRES LOGGER KING LS-2

FORESTRY TIRE FOR FULL-TREE MACHINES, SUCH AS SKIDDERS AND WHEELED FELLER BUNCHERS

- Strong diagonal carcass with steel fortification layers covering the whole tread area and shoulders. Very thick layer of CCR rubber on top of steel fortification.
- More straight tread profile enables very wide contact to surface. Wide, open and aggressive tread design with “shovel” lug shape gives great traction and self-cleaning.
- In extreme versions there are added layers of carcass material and extra layers of steel in tread that give more load-bearing capacity and ultimate puncture resistance.



Product code	Size	LI/SS	Ply rating	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tread code	Tube product code	Load capacity for log skidder drive wheel for cable and grapple skidders forestry service, lb		Load capacity for log skidder drive wheel (other than on cable or grapple skidder) transport service, lb			
														Speed (mph)		Speed (mph)			
T445616	23.1-26	160A6 (156A8)	16	DW20B	23.8	63.9	29.5	192.2	41	41	68	LS-2	T55102	5	13890	10	15	17.5	25
T445615	28L-26	165A6 (161A8)	20	DW25B	28.3	64.8	29.7	194.7	41	41	73	LS-2	T55101		15985	13670	12565	11355	10250
T445614	24.5-32	169A6 (167A8)	20	DH21	25.1	72	33.3	217.2	41	45	73	LS-2	T55393		18080	15430	14220	12895	11575
T445621	30.5L-32	170A6 (167A8)	20	DH27	30.4	72.6	33.6	218.2	35	35	84	LS-2	T55388		18520	15875	14550	13230	11905



[NOKIANTYRES.COM/LOGGERKINGLS2](https://www.nokiantyres.com/loggerkingls2)



NOKIAN TYRES LOGGER KING LS-2 EXTREME

TIRE FOR FULL-TREE MACHINES, I. A. SKIDDERS AND WHEELED FELLER BUNCHERS

- Strong diagonal carcass with steel fortification layers covering the whole tread area and shoulders. Very thick layer of CCR rubber on top of steel fortification.
- More straight tread profile enables very wide contact to surface. Wide, open and aggressive tread design with “shovel” lug shape gives great traction and self-cleaning.
- In extreme versions there are added layers of carcass material and extra layers of steel in tread that give more load-bearing capacity and ultimate puncture resistance.



Product code	Size	LI/SS	Ply rating	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tread code	Tube product code	Load capacity for log skidder drive wheel for cable and grapple skidders forestry service, lb		Load capacity for log skidder drive wheel (other than on cable or grapple skidder) transport service, lb				
														Speed (mph)		Speed (mph)				
														5		5	10	15	17.5	25
T445613	30.5L-32	176A6 (172A8)	26	DH27	30.6	72.5	33.4	218.4	45	45	84	LS-2	T55388	22045	18850		17305	15655	14110	
T445620	35.5L-32	183A6 (180A8)	26	DH31	36	79.1	36.2	238.7	41	41	84	LS-2	T55879	27005	23150	21275	19290	17305		



NOKIANTYRES.COM/LOGGERKINGLS2EXTREME



AGRICULTURAL AND CONTRACTING

NOKIAN TYRES COUNTRY KING

EFFICIENT RADIAL FLOTATION TIRE FOR AGRICULTURAL TRANSPORTATIONS ON ROAD AND FIELD

- Durability and low rolling resistance due to high positive pattern ratio and special tread compound.
- Soil and crop damage prevention with large pattern contact and rounded shoulder design.
- Directional stability and controlled handling performance with high strength steel belted construction.



Product code	Size	LI/SS	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	SRI	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tube product code	Load capacity for mixed, lb					
													Speed (mph)					
													25	27.5	30	35	37.5	40
T445453	500/60R22.5	155D	AG16.00	20.1	46.1	20.5	141	550	58	58	21	T55096	11620	11025	10340	9745	9140	8545
T445402	560/45R22.5	152D	AG16.00	21.2	42.4	18.7	129.1	525	58	58	20	T56435	10650	10095	9470	8920	8380	7825
T445401	560/60R22.5	161D	AG16.00	22.3	48.7	21.9	148.2	600	58	58	23	T55089	13865	13150	12335	11630	10915	10195
T445405	580/65R22.5	166D	AG16.00	23	51.1	23.1	156.6	625	58	58	24	T55089	15895	15070	14145	13315	12500	11685
T445441	600/50R22.5	159D	AG20.00	23.4	46.1	21	140.7	550	58	58	23	T55089	13120	12445	11675	11000	10320	9645
T445407	650/50R22.5	163D	AG20.00	25.4	48.6	22.2	149.2	575	58	58	23	T55089	14615	13865	13005	12260	11495	10750
T445542	710/35R22.5	157D	AG24.00	27.4	42.1	19.1	127.9	525	58	58	28		12370	11730	11000	10375	9735	9095
T445496	710/45R22.5	165D	AG24.00	27.4	47.8	21.5	145.5	575	58	58	24	T55092	15445	14650	13735	12940	12145	11355
T445653	600/55R26.5	165D	AG20.00	23.7	52.6	23.8	160.3	625	58	58	28	T55098	15445	14650	13735	12940	12145	11355
T445404	620/60R26.5	169D	AG20.00	24.9	55.2	25.2	168.9	675	58	58	25	T55098	17395	16490	15475	14575	13680	12785
T445440	650/65R26.5	174D	AG20.00	25.8	59.8	27.1	183.3	725	58	58	25	T55102	20085	19060	17870	16845	15805	14770
T445406	710/50R26.5	170D	AG24.00	29.1	55.3	25.4	169.4	650	58	58	26	T55102	18440	17495	16400	15455	14505	13560
T445600	800/45R26.5	174D	AG28.00	30.3	54.9	24.5	166.9	675	58	58	33	T55102	20085	19060	17870	16845	15805	14770
T445611	650/65R30.5	176D	AG20.00	25.5	63.9	29	195.6	775	58	58	33		21285	20195	18940	17845	16745	15655
T445610	750/60R30.5	181D	AG24.00	29.9	66.1	29.8	202.5	800	58	58	33		24735	23470	22015	20735	19465	18190



NOKIANTYRES.COM/COUNTRYKING



NOKIAN TYRES CT

EARTHMOVING GRADE RADIAL FLOTATION TIRE FOR HEAVY TRANSPORTATIONS

- Exceptional mileage provided by dense and thick heavy-duty block pattern.
- Special puncture damage resistance with three layers of steel reinforcements in the tread area.
- Stable load-bearing provided by the extra-strength multilayer construction.



Product code	Size	LI/SS	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	SRI	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tube product code	Load capacity for mixed, lb					
													Speed (mph)					
													25	27.5	30	35	37.5	40
T445626	560/60R22.5	165D	AG18.00	22	49	21.9	150	600	73	73	28	T55098	15445	14650	13735	12940	12145	11355
T445627	600/50R22.5	163D	AG20.00	23.5	46.2	20.8	140.7	550	73	73	28	T55089	14615	13865	13005	12260	11495	10750
T445782	600/55R26.5	173D	AG20.00	23.7	52.6	24.1	161.3	625	87	87	30	T55098	19490	18485	17340	16335	15335	14330
T445556	650/55R26.5	177D	AG20.00	24.9	54.7	25	167.9	725	87	87	34	T55098	21890	20755	19480	18340	17220	16095
T445629	600/60R30.5	173D	AG20.00	23.9	58.9	26.8	179.9	725	73	73	33	T55098	19490	18485	17340	16335	15335	14330



NOKIANTYRES.COM/CT

NOKIAN TYRES ELS

RADIAL TRACTION FLOTATION TIRE FOR AGRICULTURAL OPERATIONS IN CHALLENGING SOIL CONDITIONS

- Reliable grip due to open, well cleaning traction pattern.
- Soil and crop damage prevention with large pattern contact and rounded shoulder design.
- Directional stability and controlled handling performance with high strength steel belted construction.



Product code	Size	LI/SS	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	SRI	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tube product code	Load capacity for mixed, lb					
													Speed (mph)					
													25	27.5	30	35	37.5	40
T445708	600/50R22.5	159D	AG20.00	23.6	45.8	20.6	140	550	58	58	24	T55089	13120	12445	11675	11000	10320	9645
T445659	710/45R22.5	165D	AG24.00	27.2	47.4	21.2	144.8	575	58	58	25	T55092	15445	14650	13735	12940	12145	11355
T445654	600/55R26.5	165D	AG20.00	23.4	52.3	23.5	160.3	625	58	58	28	T55098	15445	14650	13735	12940	12145	11355
T445465	650/65R26.5	174D	AG20.00	25.4	59.6	26.8	181.8	725	58	58	30	T55102	20085	19060	17870	16845	15805	14770
T445641	700/50R26.5	170D	AG24.00	27	53.9	24.2	165.3	650	58	58	28	T55099	17990	17065	16005	15080	14155	13230
T445601	750/55R26.5	177D	AG24.00	29.1	58.8	26.4	179.3	700	58	58	30	T55102	21890	20755	19480	18340	17220	16095
T445499	850/50R30.5	182D	AG28.00	34.7	64	28.9	194.3	775	58	58	34		25485	24175	22675	21365	20050	18740
T445470	710/55R34	177D	DW24B	27.8	64.6	29.4	196.7	775	58	58	33	T55394	21890	20755	19480	18340	17220	16095
T445469	800/50R34	181D	DW25B	31.1	64.5	29.2	196.4	800	58	58	33	T55394	24735	23470	22015	20735	19465	18190
T445500	800/60R34	186D	DW25B	31.5	71.4	32	218.2	875	58	58	38		28485	27020	25340	23875	22410	20945



NOKIANTYRES.COM/ELS



NOKIAN TYRES FLOAT KING VF

ADVANCED TRACTION TIRE WITH HIGHLY EFFICIENT GROUND CONTACT FOR HIGH-POWER TRACTORS IN FARMING

- Flexforce VF construction combines strength with high flexibility to produce an effective XXL-sized ground contact
- The grip pattern works great in challenging soil conditions and on road
- The center-zone pattern with continuous contact balances behaviour and reduces loss of power on field and on road



Product code	Size	LI/SS	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	SRI	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Load capacity, lb					
												25	27.5	30	35	37.5	40
T445739	750/60R30.5	183D	AG24.00	30	66.4	28.3	202.5	800	41	41	35	24890	23735	22575	21420	20450	19290
T445821	850/50R30.5	184D	AG28.00	34.8	65.1	28	197.4	775	41	41	35	25595	24405	23215	22025	21030	19840
T445819	800/60R32	188D	DW27B	32.8	71	30.7	216	850	41	41	35	28440	27115	25795	24470	23370	22045
T445818	710/55R34	179D	DW23B	28.7	65.8	28.9	200.7	775	41	41	35	22045	21020	19995	18970	18110	17085
T445820	800/50R34	183D	DW25B	31.7	66.5	28.8	202.3	800	41	41	35	24890	23735	22575	21420	20450	19290



NOKIANTYRES.COM/FLOATKINGVF

NOKIAN TYRES TR MULTIPLUS

FOR TRACTORS USED IN VERSATILE CONDITIONS LIKE FORESTRY, AGRICULTURAL WORK AND ROAD TRANSPORTS

- Radial construction forms wide footprint together with deep and open tread design, enabling excellent traction properties.
- Radial construction enables durability and good driving properties in road transports.
- Strengthened sidewalls enable use in conditions where punctures and cuts are possible, such as stony fields or forests.



Product code	Size	LI/SS	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	SRI	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tread code	Tube product code	Load capacity for tractor, lb					
														15	17.5	22.5	25	27.5	30
T445410	500/65R24	142A8 (139B)	DW15L	19.3	48.9	22.6	147	600	35	46	60	R-1	T55116	6480	6250	6020	5840	5610	5315
T445411	500/65R28	144A8 (141B)	DW15L	19.3	52.8	24.5	159.6	650	35	46	60	R-1	T55097	6855	6605	6360	6175	5930	5620
T445412	540/65R28	149A8 (146B)	DW16	20.6	55.5	25.7	167.5	675	35	46	64	R-1	T545229	7960	7670	7385	7165	6880	6525
T445413	600/65R34	157A8 (154B)	DW18L	23	64.6	29.5	194.1	775	35	46	66	R-1	T55395	10095	9735	9370	9095	8730	8280
T445414	600/65R38	159A8 (156B)	DW18L	23	68.6	31.9	208.3	825	35	46	66	R-1	T55445	10705	10320	9930	9645	9260	8775
T445415	650/65R38	164A8 (160B)	DW20B	25.2	71.2	33	215.9	875	35	46	67	R-1	T545322	11925	11495	11065	10750	10320	9780



NOKIANTYRES.COM/TRMULTIPLUS



NOKIAN TYRES GROUND KING

CROSSOVER TIRE FOR MIXED AGRICULTURAL WORK

- Advanced alternative for the lug pattern traction tire that combines the features and benefits of two pattern types.
- Solid performance on fields and roads with traction, multi-directional grip and continuous contact.
- Supports the versatile use of implements with stability, high strength and load capacity.



Product code	Size	LI/SS	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	SRI	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tread code	Load capacity for tractor, lb					
													27.5	30	35	37.5	40	42.5
T445733	420/70R28	144D (141E)	DW13	16.1	53.2	24.4	161.5	650	46	46	58	R-1W	6605	6480	6360	6260	6175	5620
T445764	480/65R28	148D (145E)	DW15L	18.7	53.1	24.3	161.1	650	46	46	57	R-1W	7430	7295	7155	7045	6945	6315
T445735	480/70R28	151D (148E)	DW15L	18.5	55.5	25.3	168.1	675	46	46	60	R-1W	8135	7990	7835	7715	7605	6925
T445737	540/65R28	154D (151E)	DW18L	21.1	55.2	25.1	167.1	675	46	46	63	R-1W	8850	8685	8520	8390	8265	7530
T445762	600/65R28	160D (156E)	DW20B	23.6	59.3	26.9	179.7	700	46	46	69	R-1W	10615	10415	10220	10075	9920	9030
T445763	600/70R28	164D (160E)	DW20B	23.7	61.5	27.9	187.2	725	46	46	69	R-1W	11795	11575	11355	11190	11025	10030
T445728	540/65R30	155D (152E)	DW18L	21.1	58.1	26.7	175.2	700	46	46	63	R-1W	9140	8975	8795	8675	8545	7770
T445726	600/70R30	165D (161E)	DW20B	23.6	62.5	28.1	189.8	750	46	46	69	R-1W	12145	11925	11695	11520	11355	10330
T445729	600/65R34	163D (159E)	DW20B	23.6	64.7	29.6	197.5	775	46	46	69	R-1W	11495	11290	11065	10915	10750	9780
T445730	600/70R34	167D (163E)	DW20B	23.4	67	30.4	203.5	800	46	46	69	R-1W	12855	12620	12380	12190	12015	10935
T445731	650/65R34	167D (164E)	DW20B	24.9	66.9	30.3	203.7	825	46	46	69	R-1W	12855	12620	12380	12190	12015	10935
T445732	520/70R38	160D (157E)	DW16L	20.3	69	31.6	210.3	825	46	46	69	R-1W	10615	10415	10220	10075	9920	9030
T445734	580/70R38	166D (163E)	DW18L	22.7	72	32.9	219.4	875	46	46	71	R-1W	12500	12270	12035	11860	11685	10635
T445765	600/65R38	165D (161E)	DW20B	23.7	68.7	31.4	209.5	825	46	46	69	R-1W	12145	11925	11695	11520	11355	10330
T445738	650/65R38	169D (166E)	DW20B	25	71.7	32.6	218.1	875	46	46	74	R-1W	13680	13425	13175	12975	12785	11640
T445743	650/85R38	178D (175E)	DW20B	25.4	81.5	36.7	246.9	975	46	46	79	R-1W	17690	17360	17030	16790	16535	15045
T445744	710/70R38	177D (174E)	DW23B	27.8	76.9	34.8	233.6	925	46	46	78	R-1W	17220	16900	16580	16335	16095	14650
T445727	650/65R42	170D (167E)	DW20B	25	75.3	34.3	228.8	925	46	46	74	R-1W	14155	13890	13625	13425	13230	12035
T445725	710/70R42	179D (175E)	DW23B	27.8	81.1	36.7	245.9	975	46	46	78	R-1W	18285	17945	17605	17340	17085	15555
T445722	710/75R42	181D (178E)	DW23B	27.7	83.9	38	255	1000	46	46	78	R-1W	19465	19105	18740	18465	18190	16555



NOKIANTYRES.COM/GROUNDKING



NOKIAN TYRES HAKKAPELIITTA TRI

A M+S BLOCK PATTERNED TIRE WITH SUPERIOR WINTER GRIP FOR YEAR-ROUND WORK IN BUILT ENVIRONMENTS

- Safety and effectivity with siped M+S block pattern and all-season grip compound.
- High level comfort due to low noise and vibration design.
- Use economy in year round use with long service life tread compound and energy efficiency.



ALL SIZES FOR TRACTOR

Product code	Size	LI/SS	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	SRI	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tread code	Load capacity for constant load, lb					
													Speed (mph)					
													25	27.5	30	35	37.5	40
T845540	250/75R16	120G	8	10.2	30.8	14.3	94.1	370	65	65	20	R-4	3680	3585	3450	3360	3295	3195
T845541	250/80R16	119G	8	10.8	32.2	14.8	98.2	390	65	65	21	R-4	3935	3825	3695	3595	3515	3415
T445667	400/60R18	148A8 (143D)	13	15.7	37.4	16.8	113	450	73	73	33	R-4	6910	6725	6495	6305	6185	6010
T445756	360/70R20	136A8 (131D)	W11	13.5	40.5	18.3	122.5	475	46	46	30	R-4	4950	4815	4640	4520	4430	4300
T445757	300/80R24	133A8 (128D)	DW10	11.9	42.4	19.4	128.3	525	46	46	30	R-4	4565	4440	4290	4165	4090	3970
T445753	340/80R24	140A8 (135D)	DW11	13.1	44.8	20.4	135.6	550	46	46	30	R-4	5525	5380	5190	5050	4950	4805
T445587	360/80R24	143A8 (138D)	DW11	14.1	46.7	21.4	141.7	575	46	46	30	R-4	6160	5995	5785	5620	5525	5355
T445582	400/80R24	149A8 (144D)	DW13	15.7	49.1	22.3	148.4	600	46	46	31	R-4	7100	6910	6670	6480	6360	6175
T445634	440/80R24	154A8 (149D)	DW14L	17.1	50.9	23	154.4	625	46	46	33	R-4	8245	8025	7740	7530	7385	7165
T445752	360/80R28	146A8 (142D)	DW11	13.7	51.6	23.4	157.4	625	46	46	30	R-4	6525	6360	6130	5965	5840	5675
T445584	400/80R28	151A8 (146D)	DW13	15.7	53.2	24.3	161.5	650	46	46	31	R-4	7795	7595	7320	7120	6980	6780
T445563	440/80R28	156A8 (151D)	DW14L	17.3	55.7	25.2	168.7	675	46	46	33	R-4	9005	8765	8455	8225	8060	7825
T445772	540/65R28	160A8 (155D)	DW18L	21.1	55	25	167	675	46	46	35	R-4	9820	9570	9225	8975	8795	8545
T445758	440/80R30	157A8 (153D)	DW14L	17.1	57.3	25.9	174.3	700	46	46	33	R-4	9260	9015	8685	8455	8290	8045
T445754	480/80R30	162A8 (157D)	DW15L	18.3	60.5	27.2	183.9	725	46	46	34	R-4	10460	10185	9820	9545	9370	9095
T445609	540/65R30	161A8 (156D)	DW18L	20.9	57.6	26.2	174.4	700	46	46	35	R-4	10140	9875	9525	9260	9085	8820
T445736	540/65R30	171A8 (166D)	DW18L	21	57.5	26.3	174.9	700	65	65	35	R-4	13435	13085	12620	12270	12035	11685
T445848	600/70R30	171A8 (166D)	DW20B	23.7	62.2	27.9	187.9	750	46	46	38	R-4	13435	13085	12620	12270	12035	11685
T445588	440/80R34	159A8 (155D)	DW14L	17.4	61.8	28.3	187.5	750	46	46	33	R-4	9820	9570	9225	8975	8795	8545
T445583	480/80R34	164A8 (159D)	DW15L	19	64.2	29.3	195.4	775	46	46	34	R-4	11090	10805	10415	10130	9930	9645
T445700	600/70R34	172A8 (168D)	DW20B	23.3	66	29.7	200.9	800	46	46	35	R-4	14200	13825	13340	12965	12720	12345
T445585	480/80R38	166A8 (161D)	DW15L	18.8	68.2	31.2	208	825	46	46	34	R-4	11730	11420	11010	10705	10505	10195
T445564	540/80R38	172A8 (167D)	DW18L	21.9	72.2	32.8	219.1	875	46	46	34	R-4	14200	13825	13340	12965	12720	12345
T445773	650/65R38	175A8 (170D)	DW20B	24.6	71.7	32.5	218.7	875	46	46	39	R-4	15210	14815	14285	13890	13625	13230
T445595	650/65R42	176A8 (171D)	DW20B	24.7	75.3	34.3	229.8	925	46	46	39	R-4	15600	15190	14640	14240	13965	13560
T445847	710/70R42	185A8 (180D)	DW23B	27.7	81.3	33.7	246.1	975	46	46	44	R-4	20285	19755	19050	18520	18165	17635

ALL SIZES FOR WHEEL LOADER

Product code	Size	LI/SS	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	SRI	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tread code	Load capacity for constant load, lb					
													Speed (mph)					
													25	27.5	30	35	37.5	40
T445665	340/80R18	143A8 (138D)	11	12.9	39.4	17.8	119.3	475	58	58	30	R-4	5985	5830	5620	5465	5355	5205
T445832	400/70R18	147A8 (143D)	13	15.7	40.1	18	120.8	475	58	58	33	R-4	6910	6725	6495	6305	6185	6010
T445666	360/80R20	148A8 (143D)	11	14.2	43	19.4	130.4	525	58	58	30	R-4	6910	6725	6495	6305	6185	6010
T445636	400/70R20	149A8 (144D)	13	15.5	42.2	19.1	127.2	500	58	58	33	R-4	7100	6910	6670	6480	6360	6175
T445586	420/65R24	151A8 (146D)	DW13	15.8	45.6	20.5	137.3	550	58	58	31	R-4	7605	7410	7145	6945	6810	6615
T445669	460/70R24	166A8 (161D)	DW14L	18.1	49.4	21.9	149.3	600	73	73	38	R-4	11730	11420	11010	10705	10505	10195
T445671	500/70R24	171A8 (166D)	DW16L	19.7	51.7	22.8	156.3	625	73	73	38	R-4	13435	13085	12620	12270	12035	11685
T445672	540/70R24	175A8 (170D)	DW18L	21.3	53.8	23.7	163.1	650	73	73	38	R-4	15210	14815	14285	13890	13625	13230



NOKIANTYRES.COM/HAKKAPELIITTATRI



NOKIAN TYRES SOIL KING VF

ADVANCED TRACTION TIRE WITH HIGHLY EFFICIENT GROUND CONTACT FOR HIGH-POWER TRACTORS IN FARMING

- Flexforce VF construction combines strength with high flexibility to produce an effective XXL-sized ground contact
- Deep and extra wide pattern, provides big and powerful traction surface
- The center-zone pattern featuring extended and laterally supported lug tips balances behaviour and reduces loss of power on field and on road



Product code	Size	LI/SS	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	SRI	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tread code	Load capacity, lb					
													Speed (mph)					
													25	30	35	37.5	40	42.5
T445813	600/70R28	167D (164E)	DW21B	24.2	62.2	27	185.2	725	29	41	69	R-1W	12015	12015	12015	12015	12015	10935
T445811	540/65R30	158D (155E)	DW20B	22	58.6	26.2	175	700	29	41	69	R-1W	9370	9370	9370	9370	9370	8530
T445861	600/60R30	162D (158E)	DW20B	23.1	58.7	25.8	174.9	700	29	41	69	R-1W	10470	10470	10470	10470	10470	9535
T445769	600/70R30	168D (165E)	DW21B	24.2	62.9	27.4	189.6	750	29	41	69	R-1W	12345	12345	12345	12345	12345	11235
T445760	600/70R34	170D (167E)	DW21B	24.1	67.7	29.7	202.4	800	29	41	73	R-1W	13230	13230	13230	13230	13230	12035
T445815	650/60R34	168D (165E)	DW23B	25.9	65.6	28.9	196	775	29	41	73	R-1W	12345	12345	12345	12345	12345	11235
T445830	650/65R34	170D (167E)	DW23B	26	67.7	29.9	203.1	825	29	41	73	R-1W	13230	13230	13230	13230	13230	12035
T445808	650/85R38	182D (179E)	DW23B	26.3	81.3	35.4	243.7	975	29	41	79	R-1W	18740	18740	18740	18740	18740	17055
T445810	650/65R42	174D (170E)	DW23B	25.9	75.7	33.7	227.2	925	29	41	74	R-1W	14770	14770	14770	14770	14770	13435
T445768	710/70R42	182D (179E)	DW25B	28.7	81.7	35.7	247	975	29	41	79	R-1W	18740	18740	18740	18740	18740	17055
T445759	710/75R42	184D (181E)	DW25B	28.6	84.6	37.1	253.9	1000	29	41	83	R-1W	19840	19840	19840	19840	19840	18055



NOKIANTYRES.COM/SOILKINGVF



NOKIAN TYRES TRI 2

A M+S BLOCK PATTERNED TIRE FOR WORK ON HARD GROUNDS AND ROADS IN ALL SEASONS

- Use economy with durable long service life block pattern and energy efficiency.
- Reliable grip and comfortable handling also in varying weather conditions.
- Use of heavy implements enabled by high load capacity and strength of steel belted construction.



Product code	Size	LI/SS	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	SRI	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tread code	Tube product code	Load capacity for constant load, lb					
														25	27.5	30	35	37.5	40
T845539	250/75R16	120G	8	10.2	30.8	14.3	94.1	370	65	65	20	R-4		3680	3585	3450	3360	3295	3195
T845495	250/80R16	119G	8	10.8	32.2	14.8	98.2	390	65	65	21	R-4		3935	3825	3695	3595	3515	3415
T445391	340/80R18	143A8 (138D)	11	13.4	39.4	17.8	118.5	475	58	58	31	R-4		5985	5830	5620	5465	5355	5205
T445569	360/70R20	136A8 (131D)	11	13.4	40.6	18.5	122.2	500	46	46	33	R-4		4950	4815	4640	4520	4430	4300
T445389	360/80R20	147A8 (143D)	11	14	43.1	19.5	129.4	500	58	58	33	R-4	T55093	6910	6725	6495	6305	6185	6010
T445419	300/80R24	133A8 (128D)	DW10	11.6	42.9	19.8	129.8	525	46	46	30	R-4	T55100	4565	4440	4290	4165	4090	3970
T445376	340/80R24	140A8 (135D)	DW11	13	45.4	20.5	137.3	550	46	46	31	R-4	T55105	5525	5380	5190	5050	4950	4805
T445378	360/80R24	143A8 (138D)	DW11	13.7	46.6	21.2	140.7	575	46	46	33	R-4	T55105	6160	5995	5785	5620	5525	5355
T445372	400/80R24	149A8 (144D)	DW13	15.6	49.1	22	148.1	600	46	46	34	R-4	T55112	7100	6910	6670	6480	6360	6175
T445392	420/65R24	151A8 (146D)	DW13	15.8	45.5	20.7	137.5	550	58	58	33	R-4	T55100	7605	7410	7145	6945	6810	6615
T445385	440/80R24	154A8 (149D)	DW14L	17	51.6	23	155.8	625	46	46	35	R-4	T55112	8245	8025	7740	7530	7385	7165
T445393	460/65R24	156A8 (151D)	DW14L	17.3	47.4	21.3	143.5	575	58	58	35	R-4	T55111	8750	8520	8210	7990	7835	7605
T445467	500/70R24	164A8 (159D)	DW16L	20.3	51.5	23	155.8	625	58	58	35	R-4	T55116	11090	10805	10415	10130	9930	9645
T445420	540/65R24	158A8 (154D)	DW18L	21.5	51.6	22.9	156.1	625	46	46	35	R-4	T55116	9260	9015	8685	8455	8290	8045
T445579	320/85R28	141A8 (136D)	DW10	12.3	49.2	22.6	149.1	600	46	46	30	R-4		5830	5675	5480	5325	5225	5070
T445550	360/80R28	146A8 (142D)	DW11	13.9	51.3	23.4	155.4	625	46	46	33	R-4		6525	6360	6130	5965	5840	5675
T445383	400/80R28	151A8 (146D)	DW13	15.6	53.2	24.4	160.6	650	46	46	34	R-4	T55351	7795	7595	7320	7120	6980	6780
T445337	440/80R28	156A8 (151D)	DW14L	17.3	55.6	25.4	168	675	46	46	35	R-4	T55370	9005	8765	8455	8225	8060	7825
T445444	480/65R28	154A8 (149D)	DW15L	18.3	52.6	23.8	158.5	650	46	46	35	R-4	T55097	8245	8025	7740	7530	7385	7165
T445442	540/65R28	160A8 (155D)	DW18L	21.3	55.4	25.2	167.2	675	46	46	35	R-4	T545229	9820	9570	9225	8975	8795	8545
T445384	440/80R30	157A8 (153D)	DW14L	16.9	57.6	26	175.1	700	46	46	35	R-4	T55371	9260	9015	8685	8455	8290	8045
T445386	480/80R30	162A8 (157D)	DW15L	18.6	60.1	26.9	182.5	725	46	46	37	R-4	T55371	10460	10185	9820	9545	9370	9095
T445371	540/65R30	161A8 (156D)	DW18L	20.9	57.5	25.4	173.3	700	46	46	38	R-4	T55371	10140	9875	9525	9260	9085	8820
T445657	600/70R30	171A8 (166D)	DW20B	23.8	61.6	27.6	187.2	750	46	46	40	R-4		13435	13085	12620	12270	12035	11685
T445369	440/80R34	159A8 (155D)	DW14L	16.9	61.7	28.2	187	750	46	46	35	R-4	T55391	9820	9570	9225	8975	8795	8545
T445370	480/80R34	164A8 (159D)	DW15L	18.6	64.2	28.9	194.9	775	46	46	37	R-4	T55391	11090	10805	10415	10130	9930	9645
T445656	600/65R34	169A8 (164D)	DW20B	23.4	63.7	29	194.3	775	46	46	40	R-4		12675	12345	11905	11575	11355	11025
T445377	480/80R38	166A8 (161D)	DW15L	18.3	68.2	31.2	206.9	825	46	46	37	R-4	T55430	11730	11420	11010	10705	10505	10195
T445338	540/80R38	172A8 (167D)	DW18L	21.8	71.9	32.8	217.4	875	46	46	38	R-4	T55445	14200	13825	13340	12965	12720	12345
T445445	600/65R38	170A8 (166D)	DW18L	23	68.5	31.1	208.3	825	46	46	38	R-4	T55445	13435	13085	12620	12270	12035	11685
T445443	650/65R38	175A8 (170D)	DW20B	25	71.3	32.2	216.9	875	46	46	42	R-4		15210	14815	14285	13890	13625	13230
T445518	620/80R42	181A8 (177D)	DW20B	24.6	81.1	36.4	247.6	975	46	46	44	R-4		18510	18025	17385	16900	16580	16095
T445390	650/65R42	176A8 (171D)	DW20B	24.3	75.3	33.4	228	925	46	46	42	R-4		15600	15190	14640	14240	13965	13560
T445655	710/70R42	185A8 (180D)	DW23B	28.2	80.5	36.3	246.3	975	46	46	47	R-4		20285	19755	19050	18520	18165	17635



NOKIANTYRES.COM/TRI2



NOKIAN TYRES TRI STEEL

PUNCTURE PROTECTION FOR SPECIAL APPLICATIONS

- A special loader tire with a puncture-resisting block pattern.
- Steel fortification for extra durability.
- Suitable for waste treatment, recycling plants and for industrial use.



Product code	Size	LI/SS	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	SRI	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tread code	Tube product code	Load capacity for constant load, lb					
														Speed (mph)					
														25	27.5	30	35	37.5	40
T445245	460/65R24	156A8 (151D)	DW13	18.4	47.6	21.5	141	575	58	58	34	R-4	T55111	8750	8520	8210	7990	7835	7605
T445222	480/65R24	151A8 (146D)	DW14L	19.2	48.6	22.2	147.2	600	46	46	35	R-4	T55111	7605	7410	7145	6945	6810	6615



MUD SNOW



PUNCTURE PROTECTION



RADIAL



STEEL BELTED



TUBELESS



NOKIANTYRES.COM/TRISTEEL



UNDERGROUND MINING

NOKIAN TYRES ARMOR GARD 2 MINE

STRONG TIRE FOR DRILL RIGS WITH MINING COMPOUND AND IMPROVED, WIDER TREAD

- New, improved tread lowers the contact pressure and improves service life, providing excellent cut resistance.
- Stable, accurate driving response for predictable handling and a high load-bearing capacity.
- Groove depth indicator helps monitor your tire condition.



Product code	Size	LI/SS	Ply rating	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tread code	Tube product code	Min. dual spacing (mm)	Load capacity, lb					
															0	creep	2.5	5	12	15
T445836	9.00-20	162A5	16	7.0	10.6	40.9	18.9	123.4	145	145	23	E-2	T52520	12.2	15820	13615	13615	13615	10470	10470
T445770	10.00-20	164A5	16	7.5	11.2	42.1	19.1	126.3	131	131	26	E-2	T52620	13.1	16645	14330	14330	14330	11025	11025



NOKIANTYRES.COM/ARMORGARD2MINE

NOKIAN TYRES MINE KING E-4

PURPOSE DESIGNED AND BUILT SPECIAL TIRE FOR DRILL RIGS AND UTILITY VEHICLES

- Strong carcass with a maximum operating pressure of 10 bars, giving a solid foundation for your drill rig.
- Deep grooves with a solid middle section for good puncture resistance and a long tire service life.
- Sharp shoulders and large contact area for better grip.



Product code	Size	LI/SS	Ply rating	TL/TT	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tread code	Tube product code	Min. dual spacing (mm)	Load capacity, lb					
																0	creep	2.5	5	12	15
T445712	12.00-20	176A5	20	TT	8.5	13	45.2	20.5	135.8	145	145	44	E-4	T52810	14.9	23635	20350	20350	20350	15655	15655
T445617	14.00-20	185A2	20	TT	10.0	14.6	48.2	22	144.4	145	145	50	E-4	T52920	17.7	26510	23250	20395	17745	17130	16315
T445709	14.00-24	188A2	28	TL	10.00WA	15.1	54.8	24.8	163.5	134	145	58	E-4	T55767	17.7	28660	25135	22045	19180	18520	17635



NOKIANTYRES.COM/MINEKINGE4



NOKIAN TYRES NORDMAN MINE E-4

DURABILITY FOR ARTICULATED DUMP TRUCKS

- Durable radial all-steel structure
- Excellent choice for rough conditions in quarries
- Cost effective mine tire - EUR/h



Product code	Size	LI/SS	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tread code	Min. dual spacing (mm)	Load capacity, lb					
													Speed (mph)					
T845483	26.5R25	209A2 (193B)	22.00/3.0	26.9	70.8	30.3	210.7	83	102	69	E-4	31.8	34260	32630	31405	30180	28550	25695
T845482	29.5R25	216A2 (200B)	25.00/3.5	30.2	75.6	32.2	226.3	83	102	76	E-4	35.4	41480	39505	38030	36540	34570	31105



NOKIANTYRES.COM/NORDMANMINEE4

NOKIAN TYRES MINE KING L-5S

FOR EXTREME UNDERGROUND LOADING APPLICATIONS

- More strengthening layers to ensure tire safety in demanding applications.
- High load capacity, enabling use in heavier, more effective machines.
- Cut and crack resistant tread provides a long service life.



Product code	Size	LI/SS	Ply rating	TL/TT	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tread code	Tube product code	Min. dual spacing (mm)	Load capacity, lb			
																Speed (mph)			
T445544	12.00-20	173A2	20	TT	8.5	13.5	46.4	21.7	141	123	145	45	L-5S	T52810	14.9	22930	18630	16335	14330
T445540	17.5-25	184A2	24	TL	14.00/1.5	17.5	55.1	26	168.9	98	116	83	L-5S	T55867	21	31745	25795	22620	19840
T445580	17.5-25	188A2	34	TL	14.00/1.5	17.9	55.7	26.1	169.6	116	145	83	L-5S	T55867	21	35275	28660	25135	22045
T445545	18.00-25	202A2	32	TL	13.00/2.5	20.7	65.9	30.4	201.6	109	116	100	L-5S	T55831	23.5	52910	42990	37700	33070
T445546	26.5-25	209A2	36	TL	22.00/3.0	26.9	70.5	32.6	216.7	91	116	113	L-5S		31.8	65255	53020	46495	40785
T445547	29.5-29	218A2	40	TL	25.00/3.5	30.2	79.5	36.4	241.9	91	116	123	L-5S		35.4	83245	67640	59315	52030



NOKIANTYRES.COM/MINEKINGL5S



NOKIAN TYRES MINE L-3S

THE FIRST UNDERGROUND LOADER TIRE THAT IS READY FOR PROTECTIVE CHAINS

- Strong, stable tire for extreme conditions.
- Supports the chains in an optimal way and can be set instantly – no modification is needed.
- With chains compatible with the chainless L-5S tires.



Product code	Size	LI/SS	Ply rating	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tread code	Min. dual spacing (mm)	Load capacity, lb			
														0	creep	2.5	5
T445522	26.5-25	209A2	36	22.00/3.0	26	67.2	30.5	202.2	91	116	53	L-3S	31.8	65255	53020	46495	40785



[NOKIANTYRES.COM/MINEL3S](https://www.nokiantyres.com/minel3s)



PORTS AND TERMINALS

NOKIAN TYRES ARMOR GARD

LONG SERVICE LIFE FOR MATERIAL HANDLING MACHINES AND LOADERS

- Strong tire carcass enables precise steering and stability.
- Special rubber compound optimized for harbor use gives an excellent service life.
- Sturdy structure enables long service life as well as great retreading properties.



Product code	Size	LI/SS	Ply rating	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tread code	Tube product code	Min. dual spacing (mm)	Load capacity for load wheel, lb						
															Speed (mph)						
															0	creep	2.5	5	12	15	
T445459	12.00-20	176A5 (176A5)	20	8.5	13	45.2	20.5	135.1	145	145	32	E-2	T52810	14.9	23635	20350	20350	20350	20350	20350	20350



NOKIANTYRES.COM/ARMORGARD

NOKIAN TYRES HTS G2 E-4

KEEP THE GOODS MOVING – EFFICIENTLY AND ECONOMICALLY

- Supported blocks with chamfered edges improve tire cooling and turning properties.
- Bias carcass structure improves the tire stability and enables effective loading operations.
- Harbour-specific tread compound enables excellent service life.



Product code	Size	LI/SS	Ply rating	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tread code	Tube product code	Min. dual spacing (mm)	Load capacity for load wheel, lb					
															Speed (mph)					
															0	creep	2.5	5	12	15
T445710	14.00-24	188A5	28	10.00WA	15.4	55	25.2	165.2	145	145	60	E-4	T55767	17.7	33070	28660	28660	28660	28660	28660
T445711	16.00-25	199A5	36	11.25/2.0	17.8	60.5	27.3	181.3	145	145	72	E-4	T55810	20.4	44975	38980	38980	38980	38980	38980
T445637	18.00-25	207A5	40	13.00/2.5	21.2	65.6	30.1	200.8	145	145	73	E-4	T55831	23.5	57870	50155	50155	50155	50155	
T445662	18.00-33	214A5	40	13.00/2.5	20.2	73.5	33.4	222.4	145	145	88	E-4		23.5	70105	60760	60760	60760	60760	



NOKIANTYRES.COM/HTSG2E4



NOKIAN TYRES HTS G2 L-4S

HARD-WEARING REACH STACKER TIRE WITH SLICK, SMOOTH TREAD

- Deep, long-lasting smooth tread for extensive tire service life and puncture resistance.
- Bias carcass structure improves the tire stability and enables effective loading operations.
- Harbour-specific tread compound enables excellent service life.



Product code	Size	LI/SS	Ply rating	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tread code	Tube product code	Min. dual spacing (mm)	Load capacity for load wheel, lb						
															Speed (mph)						
															0	creep	2.5	5	12	15	
T445638	18.00-25	207A5	40	13.00/2.5	21.2	65.6	30.3	196.9	145	145	74	L-4S	T55831	23.5	57870	50155	50155	50155	50155	50155	50155
T445663	18.00-33	214A5	40	13.00/2.5	20.4	73.2	33.4	223.1	145	145	76	L-4S		23.5	70105	60760	60760	60760	60760	60760	60760



DAMPING



DIAGONAL



TREAD DEPTH INDICATOR



TUBELESS



NOKIANTYRES.COM/HTSG2L4S

NOKIAN TYRES HTS G2 L-5S

LONG-LASTING FRONT TIRE FOR REACH STACKERS – THE SMOOTH, EXTRA-DEEP TREAD OFFERS MORE WORKING HOURS

- Extra-deep, long-lasting smooth tread increases tread durability and puncture resistance.
- Bias carcass structure improves the tire stability and enables effective loading operations.
- Harbour-specific tread compound enables excellent service life.



Product code	Size	LI/SS	Ply rating	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tread code	Tube product code	Min. dual spacing (mm)	Load capacity for load wheel, lb						
															Speed (mph)						
															0	creep	2.5	5	12	15	
T445805	18.00-25	207A5	40	13.00/2.5	20.6	65.7	29.3	198.1	145	145	100	L-5S	T55831	23.5	57870	50155	50155	50155	50155	50155	50155



DAMPING



DIAGONAL



TREAD DEPTH INDICATOR



TUBELESS



NOKIANTYRES.COM/HTSG2L5S



NOKIAN TYRES RTG

MORE AGILITY AND DURABILITY FOR THE RTG CRANES

- Tread pattern and tire shape that allow the wheel to turn more easily.
- Low heat build-up slows down tire wear and gives it more operating hours.
- Special rubber compound optimized for harbour use.



Product code	Size	LI/SS	Ply rating	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tread code	Tube product code	Min. dual spacing (mm)	Load capacity, lb				
															Speed (mph)				
															0	2.5	5	12	15
T445471	14.00-24	188A5	28	10.00W	15.4	53.7	24.8	163.3	145	145	29	E-2	T55767	17.7	33070	28660	28660	28660	28660



NOKIANTYRES.COM/RTG

NOKIAN TYRES HTS TUGGER

MASSIVE LOAD CAPACITY FOR TERMINAL TRACTORS

- Sturdy multi-layer structure enables exceptional load-bearing capacity.
- Optimized for predictable handling.
- Designed to be as low as possible without compromising other qualities, making it ideal for terminal tractor use.



Product code	Size	LI/SS	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tread code	Min. dual spacing (mm)	Load capacity, lb					
													Speed (mph)					
													creep	2.5	5	12	15	22.5
T445221	315/60R22.5	174A5	9.00	11.9	37.3	16.7	113.8	145	145	26	IND-3	14.8	19200	19200	19200	16625	16625	14770



NOKIANTYRES.COM/HTSTUGGER



NOKIAN TYRES ARMOR GARD 2

PREMIUM STABILITY FOR URBAN EXCAVATION

- Strong tire carcass enables precise steering and stability by absorbing shocks and swings.
- Long service life due to wider, improved tread pattern.
- The sharp shoulders and straight sidewalls prevent sidewall damages.



Product code	Size	LI/SS	Ply rating	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tread code	Tube product code	Min. dual spacing (mm)	Load capacity, lb					
															Speed (mph)					
T445649	10.00-20	148B (164A5)	16	7.5	11.1	42	19.7	124.9	109	131	26	E-2	T52620	13.1	8820	8475	8125	7705	7365	6945
T445650	11.00-20	151B (170A5)	16	8.0	12	43.5	20.4	132.3	109	131	29	E-2	T52720	13.9	9655	9280	8895	8445	8060	7605



DAMPING



DIAGONAL



TREAD DEPTH INDICATOR



TUBE TYPE



[NOKIANTYRES.COM/ARMORGARD2](https://www.nokiantyres.com/armorgard2)



EARTHMOVING AND ROAD MAINTENANCE

NOKIAN TYRES ARMOR GARD 2

PREMIUM STABILITY FOR URBAN EXCAVATION

- Strong tire carcass enables precise steering and stability by absorbing shocks and swings.
- Long service life due to wider, improved tread pattern.
- The sharp shoulders and straight sidewalls prevent sidewall damages.



Product code	Size	LI/SS	Ply rating	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tread code	Tube product code	Min. dual spacing (mm)	Load capacity, lb					
															Speed (mph)					
															15	17.5	22.5	25	27.5	30
T445649	10.00-20	148B (164A5)	16	7.5	11.1	42	19.7	124.9	109	131	26	E-2	T52620	13.1	8820	8475	8125	7705	7365	6945
T445650	11.00-20	151B (170A5)	16	8.0	12	43.5	20.4	132.3	109	131	29	E-2	T52720	13.9	9655	9280	8895	8445	8060	7605



DAMPING



DIAGONAL



TREAD DEPTH INDICATOR



TUBE TYPE



[NOKIANTYRES.COM/ARMORGARD2](https://www.nokiantyres.com/armorgard2)

NOKIAN TYRES EXCAVATOR

EXCAVATOR TIRE FOR SOFT SURFACES

- Excellent self-cleaning properties with curvy lug design improve traction on soft surfaces.
- High load-bearing capacity and improved stability.
- Steel fortified against punctures with a reinforced shoulder for a long service life.



Product code	Size	LI/SS	Ply rating	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	SRI	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tube product code	Min. dual spacing (mm)	Load capacity for constant load, lb					
															Speed (mph)					
															15	17.5	22.5	25	27.5	30
T445604	600/50-22.5	173A8	24	AG20.00	23	45.2	20.4	139	550	87	87	50	T55089	28.4	15190	14905	14615	14330	13755	13040
T445605	650/45-22.5	175A8	24	AG22.00	25.3	45.2	20.3	138.8	550	87	87	50	T55092	30.5	16125	15820	15520	15210	14605	13845
T445606	710/40-22.5	173A8	24	AG24.00	27	45.4	20.4	138.8	550	80	80	50	T55092	34.3	15190	14905	14615	14330	13755	13040



DAMPING



DIAGONAL



STEEL FORTIFIED



TREAD DEPTH INDICATOR



TUBELESS



[NOKIANTYRES.COM/EXCAVATOR](https://www.nokiantyres.com/excavator)



NOKIAN TYRES GROUND KARE

EXCAVATOR AND BACKHOE LOADER TIRE FOR VERSATILE CONTRACTING WORK

- The tread design enables low surface pressure, great traction and smooth, comfortable driving on road.
- The high load-bearing capacity enables the use of heavy auxiliary equipment.
- The special design adds stability by absorbing swings and shocks.



ALL SIZES FOR WHEELED EXCAVATOR

Product code	Size	LI/SS	Ply rating	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	SRI	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tube product code	Min. dual spacing (mm)	Load capacity for constant load, lb					
															Speed (mph)					
															15	17.5	22.5	25	27.5	30
T445828	600/40-22.5	167A8	24	AG20.00	23	41.9	19.1	126.2	500	87	87	31	T55089	28.4	12730	12500	12260	12015	11530	10935
T445798	600/50-22.5	173A8	24	AG20.00	23.7	45.5	20.1	137.6	550	87	87	33	T55089	28.4	15190	14905	14615	14330	13755	13040
T445664	650/45-22.5	175A8	24	AG22.00	26.1	45.1	20.6	137.5	550	87	87	33	T55092	30.5	16125	15820	15520	15210	14605	13845
T445799	710/40-22.5	173A8	24	AG24.00	27.5	45.1	19.9	136.9	550	80	80	33	T55092	34.3	15190	14905	14615	14330	13755	13040

ALL SIZES FOR BACKHOE LOADER

Product code	Size	LI/SS	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tube product code	Load capacity for constant load, lb					
												Speed (mph)					
												15	17.5	22.5	25	27.5	30
T445802	620/60B30	176A8 (173B)	DW20B	24.5	59.1	26.3	179.5	65	65	31	T55371	16590	16280	15960	15655	15025	14240
T445668	620/60B34	178A8 (175B)	DW20B	24.8	63.3	29.5	193.2	65	65	31	T55395	17525	17195	16865	16535	15875	15045



[NOKIANTYRES.COM/GROUNDKARE](https://www.nokiantyres.com/groundkare)

NOKIAN TYRES GROUND KARE SEMI-SLICK

EXTENDED SERVICE LIFE AND STABILITY FOR RAILWAY USE

- The unique structure of the Nokian Tyres Ground Kare Semi-Slick tire has been optimized to offer a much longer service life than regular backhoe loader tires.
- With stable, shock absorbing structure and high load-bearing capacity, Nokian Tyres Ground Kare Semi-Slick tire gives digging work a stable foundation and enables the use of heavy work attachments.
- Its tread pattern with larger blocks in the center makes driving more comfortable, and the stable structure improves the overall handling of the backhoe loader.



Product code	Size	LI/SS	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tube product code	Load capacity for constant load, lb					
												Speed (mph)					
												15	17.5	22.5	25	27.5	30
T445688	620/60B34	178A8 (175B)	DW20B	24.8	63.3	29.5	193	65	65	31	T55395	17525	17195	16865	16535	15875	15045



[NOKIANTYRES.COM/GROUNDKARESEMISLICK](https://www.nokiantyres.com/groundkaresemislick)



NOKIAN TYRES GROUND KING LOADER

STABLE AND VERSATILE LOADER TIRE WITH EXCELLENT SOFT SOIL GRIP AND ROAD HANDLING

- The Hybrilug™ technology combines the advantages of block and lug pattern, enabling smooth and silent ride on various terrains.
- Excellent self-cleaning properties improve grip for increased productivity on soft soil.
- Accurate, stable and comfortable working is ensured by the strong radial carcass with tough shoulders.



Product code	Size	LI/SS	Ply rating	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tread code	Min. dual spacing (mm)	Load capacity, lb					
														Speed (mph)					
														12	15	17.5	22.5	25	30
T445796	20.5R25	186A2	★	17.00/2.0	20.3	58.6	25.4	177.4	65	65	60	L-3	24.6	17595	16755	16125	15500	14660	13195



DAMPING



MUD SNOW



PUNCTURE PROTECTION



RADIAL



STEEL BELTED



STONE EJECTORS



STUDDABLE



TREAD DEPTH INDICATOR



TUBELESS



NOKIANTYRES.COM/GROUNDKINGLOADER

NOKIAN TYRES HAKKAPELIITTA LOADER

ALL-SEASON WHEEL LOADER TIRE WITH GREAT WINTER GRIP

- Aggressive tread design with dense siping gives you the best possible grip on snow and ice.
- All-new rubber compound and non-directional tire tread design ensure long service life and even wear.
- Re-designed carcass structure gives more lifetime and better stability.



ALL SIZES FOR ROAD GRADER

Product code	Size	LI/SS	Ply rating	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tread code	Tube product code	Min. dual spacing (mm)	Load capacity, lb				
															Speed (mph)				
															0	5	12	17.5	25
T445691	14.00R24	153A8 (176A2)	★	8.00TG	15	53.7	24.6	163.7	54	80	30	L-2	T55767	17.1	8045	8045	8045	8045	8045

ALL SIZES FOR WHEEL LOADER

Product code	Size	LI/SS	Ply rating	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tread code	Tube product code	Min. dual spacing (mm)	Load capacity, lb					
															Speed (mph)					
															12	15	17.5	22.5	25	30
T445590	17.5R25	176A2 (153A8)	★	14.00/1.5	17.3	52.9	23.3	160.6	65	65	35	L-2	T55867	21	13150	12520	12050	11585	10955	9865
T445591	20.5R25	186A2 (168B)	★	17.00/2.0	21.2	58.5	25.6	177.5	65	65	40	L-2		24.6	17595	16755	16125	15500	14660	13195
T445592	23.5R25	195A2 (176B)	★	19.50/2.5	24.2	63.4	27.4	190.9	65	65	44	L-2		28.2	22500	21430	20625	19820	18750	16875



MUD SNOW



RADIAL



SIPED



STUDDABLE



TUBELESS



NOKIANTYRES.COM/HAKKAPELIITTA LOADER



NOKIAN TYRES LOADER GRIP

STURDY GRIP FOR WHEEL LOADERS AND EARTHMOVING MACHINES

- Sturdy, hard-wearing structure for excellent mileage.
- Comfortable driving response for efficient working.
- Good winter grip makes the tire highly suitable for year-round use.



Product code	Size	LI/SS	Ply rating	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tread code	Tube product code	Min. dual spacing (mm)	Load capacity, lb					
															Speed (mph)					
T445255	17.5R25	176A2 (157B)	★	14.00/1.5	17.7	52.8	23.4	159.8	65	65	35	L-3	T55867	21	13150	12520	12050	11585	10955	9865
T445171	20.5R25	186A2 (168B)	★	17.00/2.0	20.9	58.8	25.5	177.2	65	65	39	L-3		24.6	17595	16755	16125	15500	14660	13195
T445223	23.5R25	195A2 (176B)	★	19.50/2.5	24.8	63.3	27.6	192.1	65	65	43	L-3		28.2	22500	21430	20625	19820	18750	16875



[NOKIANTYRES.COM/LOADERGRIP](https://www.nokiantyres.com/loadergrip)

NOKIAN TYRES LOADER GRIP 2

ABSOLUTE GRIP AND DURABILITY FOR WHEEL LOADERS AND ADT MACHINES

- Specially for wheel loaders designed tread blocks create traction on soft gravel and on icy, slippery roads.
- Excellent mileage and sidewall protection against sidewall slashes and abrasions.
- Stability on every terrain due to wide tire contact area and the block-patterned tread.



Product code	Size	LI/SS	Ply rating	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tread code	Min. dual spacing (mm)	Load capacity, lb					
														Speed (mph)					
T445463	15.5R25	169A2 (152B)	★	12.00/1.3	15.2	50.4	22.4	153	65	65	29	L-3	18.6	10735	10230	9845	9460	8950	8060



[NOKIANTYRES.COM/LOADERGRIP2](https://www.nokiantyres.com/loadergrip2)



ALL-TERRAIN TRUCKS AND MILITARY VEHICLES

NOKIAN TYRES MPT AGILE

ON AND OFF ROAD AGILITY

- The open arrow-shaped tread pattern ensures good self-cleaning, ensuring grip under demanding circumstances.
- Improved grip on soft surfaces such as mud and snow.
- Exceptional mobility.



Product code	Size	LI/SS	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tube product code	Load capacity for highway service, lb					
												25	30	37.5	42.5	50	55
T445431	365/80R20	152G	11	14.2	43	19.9	131.6	91	91	25	T55093	8380	8225	8225	8225	8135	7825



NOKIANTYRES.COM/MPTAGILE

NOKIAN TYRES MPT AGILE 2

NEW GENERATION TIRE FOR SPECIAL ON AND OFF ROAD VEHICLES

- Improved grip on soft surfaces such as mud and snow.
- Good steering response and stable handling on different terrains and speeds.
- Symmetrical tread pattern is designed to perform equally well regardless of the tires' rotational direction.



Product code	Size	LI/SS	Rim	Width (mm)	Diameter (mm)	Loaded static radius (mm)	Rolling circumference (mm)	Pressure (kPa)	Max. inflation pressure (kPa)	Tread depth (mm)	Tube product code	Load capacity for highway service, lb					
												25	30	37.5	42.5	50	55
T445651	14.00R20	164G	10.00V	15.7	49.8	23.1	157	110	110	31	T52920	11795	11575	11575	11575	11465	11025



NOKIANTYRES.COM/MPTAGILE2



ACCESSORIES

TIRE MOUNTING CLAMPS

Product code	Product	List price (excl. VAT)
Stone ring for wheeled excavator dual-wheel configuration		
HTTSR00001	Stone ring for Armor Gard 2 10.00-20 (T445649 and HTTK00030)	
Tyre mounting clamp		
HTTMC00001	TYRE MOUNTING CLAMP AG (15°) Big	
HTTMC00002	TYRE MOUNTING CLAMP AG (15°) Small	
HTTMC00003	TYRE MOUNTING CLAMP DW/TW (5°) Big	
HTTMC00004	TYRE MOUNTING CLAMP DW/TW/DH (5°) Small	
HTTMC00005	TYRE MOUNTING CLAMP DH (5°) Big	



HTTMC00001
Tire Mounting Clamp
Excavator/Forest

Used for 15° AG profile rims in dual clamp mounting as an assistant clamp with smaller HTTMC00002.



HTTMC00002
Tire Mounting Clamp
Excavator/Forest/Agriculture

Used for 15° AG rims in single clamp mounting and in dual clamp mounting with HTTMC00001.



HTTMC00003
Tire Mounting Clamp
Forest/Agriculture

Used for 5° DW/TW profile rims in dual clamp mounting as an assistant clamp with smaller HTTMC00004.



HTTMC00004
Tire Mounting Clamp
Forest/Skidder/Agriculture

Used for 5° DW, TW and DH profile rims in single clamp mounting and in dual clamp mounting with HTTMC00003.



HTTMC00005
Tire Mounting Clamp

Used for DW profile rims in dual clamp mounting as an assistant clamp with smaller HTTMC00004. If dual steel plate welded in rim flange, this mounting clamp doesn't fit.

INNER TUBES, FLAPS AND VALVES

Product code		Description	List price (excl. VAT)
Inner tubes for Forestry and Agriculture			
T55096		500/60-22.5 // 550/60-22.5 with TR 218 A valve	
T56435		550/45-22.5 // 560/45-22.5 with TR 218 A valve	
T55089		600/50-22.5 // 600/55-22.5 with TR 218 A valve	
T55092		700/45-22.5 // 710/40-22.5 with TR 218 A valve	
T55767		14.00-24 with TR 1175 A valve	
T55112		14.9-24 // 16.9-24 with TR 218 A valve	
T545447		650/45-24.5 with TR 218 valve	
T545448		710/40-24.5 with TR 218 valve	
T55867		17.5-25 with TRJ 1175 valve	
T55831		18.00-25 // 20.5-25 // 23.5-25 // 25/65-25 with TRJ 1175 valve	
T55097		500/60-26.5 // 540/60-26.5 // 480/65-28 // 500/65-28 with TR 218 A valve	
T55098		600/55-26.5 with TR 218 A valve	
T55102		650/65-26.5 // 750/55-26.5 // 650/60-26.5 // 620/75-26 // 23.1-26 with TR 218 A valve	
T55099		700/50-26.5 // 710/45-26.5 with TR 218 A valve	
T545312		800/40-26.5 with TR 218 A valve	
T55101		780/55-26.5 // 28L-26 with TR 218 A valve	
T545229		500/70-28 // 540/65-28 with TR 218 A valve	
T545543		780/50-28.5 // 710/55-28.5 with TR 218 A valve	
T55371		16.9-30 // 18.4-30 // 520/65-30 // 540/70-30 with TR 218 A valve	
T55393		24.5-32 with TR 218 A valve	
T55391		16.9-34/18.4-34 with TR 218 A valve	
T55395		580/65B34 // 520/65-34 // 600/65-34 with TR 218 A valve	
T55394		600/65-34 // 700/55-34 with TR 218 A valve	
T55388		700/70-34 // 30.5-32 with TR 218 A valve	
T545322		600/70-38 // 650/75-38 with TR 218 A valve	
Inner tubes for Trucks			
T52520		9.00-20 with TR 175 valve	
T52620		10.00-20 with TR 78 valve	
T52720		11.00-20 with TR 179 valve	
T52810		12.00-20 with V3.02.16 valve	
T52920		14.00-20 with TR 274 valve	
Valves			
HTOC00005		Valve for tubeless installation, TR 618 A	
Flaps and other accessories			
T299520	170-20	(9.00/10.00/11.00-20)	
T299530	195-20	(11.00, 12.00-20 with 8 inch wide rim)	
T299537	225-20	(12.00-20 with 8,5 inch or wider rim)	
T299538	260-20	(14.00-20) supplied without valve hole.	
T299531	260-24/25	(12.00-24, 14.00-24, 16.00-24 and 16.00-25) supplied without valve hole.	
T299551	350-25	(17.5-25, 18.00-25)	
T299540	430-25	(20.5-25)	
T299552	500-25	(23.5-25)	
HTOC00009	2" Plastic valve cover cap		

LOAD CAPACITY (LI), SPEED INDEX AND RECYCLING

LOAD CAPACITY (LI)

According to the EU-regulations, the load capacity must be indicated in the tires with a load index, which is marked in connection with the tire size marking or close to it. The load index is also used in some heavy tires. The below table shows the maximum load corresponding to each load index, which the tire can carry at the speed and pressure indicated by the standard.

LI	lbs	LI	lbs	LI	lbs	LI	lbs	LI	lbs
100	1 760	130	4 180	160	9 900	190	23 400	220	55 100
101	1 820	131	4 300	161	10 200	191	24 000	221	56 800
102	1 870	132	4 400	162	10 500	192	24 700	222	58 400
103	1 930	133	4 540	163	10 700	193	25 400	223	60 000
104	1 980	134	4 680	164	11 000	194	26 000	224	61 500
105	2 040	135	4 800	165	11 400	195	26 800	225	64 000
106	2 090	136	4 940	166	11 700	196	27 600	226	66 000
107	2 150	137	5 080	167	12 000	197	28 300	227	68 000
108	2 200	138	5 200	168	12 300	198	29 100	228	69 500
109	2 270	139	5 360	169	12 800	199	30 000	229	71 500
110	2 340	140	5 520	170	13 200	200	30 900	230	74 000
111	2 400	141	5 680	171	13 600	201	32 000	231	76 000
112	2 470	142	5 840	172	13 900	202	33 100	232	78 500
113	2 540	143	6 000	173	14 300	203	34 200	233	80 500
114	2 600	144	6 150	174	14 800	204	35 300	234	82 500
115	2 680	145	6 400	175	15 200	205	36 400	235	85 500
116	2 760	146	6 600	176	15 700	206	37 500	236	88 000
117	2 830	147	6 800	177	16 100	207	38 600	237	91 000
118	2 910	148	6 950	178	16 500	208	39 700	238	93 500
119	3 000	149	7 150	179	17 100	209	40 800	239	96 500
120	3 080	150	7 400	180	17 600	210	41 900	240	99 000
121	3 200	151	7 600	181	18 200	211	43 000	241	102 000
122	3 300	152	7 850	182	18 700	212	44 100	242	104 500
123	3 420	153	8 050	183	19 300	213	45 400	243	107 500
124	3 520	154	8 250	184	19 800	214	46 700	244	110 000
125	3 640	155	8 550	185	20 400	215	48 100	245	113 500
126	3 740	156	8 800	186	20 900	216	49 400	246	117 000
127	3 860	157	9 100	187	21 500	217	50 700	247	120 000
128	3 960	158	9 350	188	22 000	218	52 000	248	123 500
129	4 080	159	9 650	189	22 700	219	53 600	249	128 000

SPEED INDEX (SI)

The tires must be at least equivalent to the speed or have an index greater than the maximum structural speed of the vehicle. Too low an index leads to tire breakage. In Nokian Tyres, the speed capacity is indicated by the code placed on the side wall of the tire. For example, speed capacity B means that the tire is approved to be used up to 50 km/h, see the table below.

Marking	Speed mph	Marking	Speed mph
A2	5	D	40
A3	10	R	43
A4	12.5	F	50
A5	15	G	55
A6	20	J	62
A7	22.5	K	68
A8	25	L	75
B	30	M	81
C	35	N	87

NOKIAN[®] TYRES

SMART TIRES BRING SMART SAVINGS

NOKIAN TYRES INTUITU™ smart tire monitoring system brings vital tire information to your smartphone.




NOKIAN TYRES INTUITU™

- ✓ GET THE MOST OUT OF YOUR TIRES – more grip, fuel economy and service life
- ✓ MORE SAFETY – prevent damage on time
- ✓ MORE WARRANTY – register your tires

Intuitu™ smart tires are currently available in Finland and France.

[NOKIANTYRES.COM/INTUITU](https://www.nokiantyres.com/intuitu)

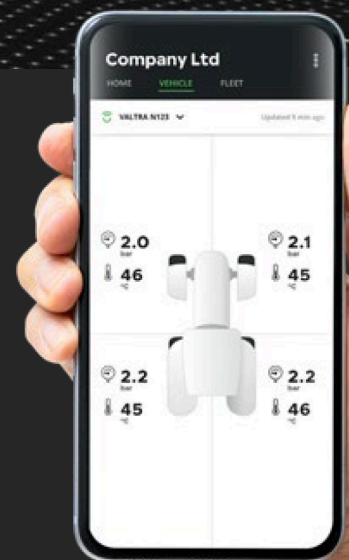

nokian[®]
TYRES

[NOKIANTYRES.COM/HEAVY](https://www.nokiantyres.com/heavy)

2025-04-15