

nokian[®] TYRES

NEW

OUTPOST AT EXTEND YOUR ADVENTURES

nokian[®]
TYRES
POTHOLE
PROTECTION[™]
FREE TIRE
REPLACEMENT IF
BEYOND REPAIR

Nokian Tyres' Pothole Protection Program is included on all Aramid Technology products. Thanks to cut-resistant Aramid Fibers embedded in the sidewalls, we have so much faith in the tire's durability that we're offering a Pothole Protection Program: If your Nokian Tyres covered product is damaged beyond repair by rough roads, potholes or curbs, we'll replace it free of charge.*

* Full terms and conditions are available at:
nokiantires.com/warranty

±45°F
±7°C

ALL-WEATHER
CONDITIONS



LIGHT TRUCK / SUV / VAN / CARGO

EXTEND YOUR TERRAIN

The Nokian Tyres Outpost AT helps drivers remove their limits and confidently go wherever their journeys demand.

- SUMMIT SIDEWALLS
- CANYON CUTS
- SHOULDER NOTCHES

EXTEND YOUR TOUGHNESS

The Nokian Tyres Outpost AT is stocked with technology to protect drivers in the most rugged environments.

- POTHOLE PROTECTION
- ARAMID SHIELD TECHNOLOGY
- GRAVEL GUARDS
- HIGH LOAD CAPACITY

EXTEND YOUR TRAVEL

The Nokian Tyres Outpost AT offers high mileage thanks to a tailored tread whose landscape is forged with protective features.

- TRIPLE PITCH DESIGN
- DURABLE TREAD COMPOUND
- TREAD BLOCK BRIDGING & SLOPE SUPPORTS
- DRIVING SAFETY INDICATOR (DSI)



UTQG: 700 A/A P-Metric sizes

P-Metric sizes: 60,000 Mile Limited Treadwear Warranty*

P-Metric sizes: 100,000 Kms Limited Treadwear Warranty*

LT sizes: 60,000 Mile Limited Treadwear Warranty*

LT sizes: 100,000 Kms Limited Treadwear Warranty*

*The Nokian Tyres 30-Day Satisfaction Guarantee and Nokian Tyres Pothole Protection excludes tires used in commercial applications.



M + S



15-22
inches



R-106 m/h • 170 km/h
S-112 m/h • 180 km/h
T-118 m/h • 190 km/h
H-130 m/h • 210 km/h

VISIT NOKIANTIRES.COM



NOKIAN TYRES OUTPOST AT • ALL-WEATHER TIRE

P-METRIC

- ARAMID TOUGH SHIELD
- UTQG RATING: 700/A/A
- 60,000 MILE LIMITED TREADWEAR WARRANTY*
- 100,000 KMS LIMITED TREADWEAR WARRANTY*



RIM	SIZE/SPEED RATING	PRODUCT CODE	WEIGHT LBS.	RIM WIDTH		OVERALL DIAMETER	OVERALL WIDTH	TREAD DEPTH 32ND	REVOLUTIONS PER	
				APPROVED	MEASURING				MILE	KM
15	235/75 R 15 109S XL	T431868	33.1	6-8	6.5	28.9	9.3	14	720	447
16	245/75 R 16 111T	T431874	37.5	6.5-8	7.0	30.5	9.8	14	681	423
	265/75 R 16 116T	T431876	43.0	7-9	7.5	31.6	10.5	14	659	410
	215/70 R 16 100T	T431879	30.9	5.5-7	6.5	27.9	8.7	14	747	464
	225/70 R 16 107T XL	T431998	32.0	6-7.5	6.5	28.4	9.0	14	731	454
	235/70 R 16 109T XL	T431880	34.2	6-8	7.0	29.0	9.4	14	715	444
	245/70 R 16 107T	T431881	36.4	6.5-8	7.0	29.5	9.8	14	706	438
	255/70 R 16 111T	T431882	38.6	6.5-8.5	7.5	30.1	10.2	14	691	429
	265/70 R 16 112T	T431883	40.8	7-9	8.0	30.6	10.7	14	681	423
17	215/65 R 16 98T	T431885	29.8	6-7.5	6.5	27.0	8.7	14	770	478
	235/75 R 17 109S	T431887	37.5	6-8	6.5	30.9	9.3	14	673	418
	255/75 R 17 115S	T431889	41.9	6.5-8.5	7.0	32.0	10.0	14	651	404
	245/70 R 17 110T	T431890	37.5	6.5-8	7.0	30.5	9.8	14	681	423
	255/70 R 17 112T	T431892	38.6	6.5-8.5	7.5	31.1	10.2	14	668	415
	265/70 R 17 115T	T431893	43.0	7-9	8.0	31.6	10.7	14	659	410
	285/70 R 17 116T	T431896	45.2	7.5-9.5	8.5	32.8	11.5	14	634	394
	235/65 R 17 108T XL	T431999	35.3	6.5-8.5	7.0	29.1	9.4	14	715	444
	245/65 R 17 107T	T431899	36.4	7-8.5	7.0	29.5	9.8	14	706	438
	255/65 R 17 110T	T431900	39.7	7-9	7.5	30.1	10.2	14	691	429
18	265/65 R 17 112T	T431901	40.8	7.5-9.5	8.0	30.5	10.7	14	681	423
	255/70 R 18 116T XL	T431902	41.9	6.5-8.5	7.5	32.1	10.2	14	647	402
	265/70 R 18 116S	T431903	43.0	7-9	8.0	32.6	10.7	14	638	396
	265/65 R 18 114H	T431907	41.9	8.5-9.5	8.0	31.5	10.7	14	659	410
	275/65 R 18 116T	T431908	44.1	7.5-9.5	8.0	32.1	11.0	14	647	402
	255/60 R 18 112T XL	T432000	39.7	7-9	7.5	30.0	10.2	14	691	429
20	265/60 R 18 110T	T431911	40.8	7-9.5	8.0	30.5	10.7	14	681	423
	275/60 R 20 115H	T431915	46.3	7.5-9.5	8.0	33.0	11.0	14	630	392
	275/55 R 20 113T	T431918	44.1	7.5-9.5	8.5	31.9	11.2	14	651	404
22	285/45 R 22 114H XL	T431924	41.9	9-10.5	9.5	32.1	11.2	14	647	402

*The Nokian Tyres 30-Day Satisfaction Guarantee and Nokian Tyres Pothole Protection excludes tires used in commercial applications.



The sidewall and tread base are reinforced with extremely strong aramid fibers for puncture & impact resistance.

GREEN AREA INDICATES WHERE THE ARAMID FIBERS HAVE BEEN ADDED.

NOKIAN TYRES OUTPOST AT • ALL-WEATHER TIRE


LT-METRIC

- ARAMID TOUGH SHIELD
- 60,000 MILE LIMITED TREADWEAR WARRANTY*
- 100,000 KMS LIMITED TREADWEAR WARRANTY*



RIM	SIZE/SPEED RATING	PRODUCT CODE	WEIGHT LBS.	RIM WIDTH		OVERALL DIAMETER	OVERALL WIDTH	TREAD DEPTH 32ND	REVOLUTIONS PER		LOAD RANGE
				APPROVED	MEASURING				MILE	KM	
15	LT235/75 R 15 116/113S	T431869	39.7	6-7	6.5	28.9	9.3	18	720	447	E
	31x10.50 R 15 LT 109S	T431870	46.3	7-9	8.5	30.5	10.5	18	681	423	C
16	LT215/85 R 16 115/112S	T431871	39.7	5.5-7	6.0	30.4	8.5	18.0	686	426	E
	LT235/85 R 16 120/116S	T431872	44.1	6-7.5	6.5	31.7	9.3	18.0	655	407	E
	LT225/75 R 16 115/112S	T431873	39.7	6-7	6.0	29.3	8.8	18.0	710	441	E
	LT245/75 R 16 120/116S	T431875	44.1	6.5-8	7.0	30.5	9.8	18.0	681	423	E
	LT265/75 R 16 123/120S	T431877	49.6	7-8	7.5	31.6	10.5	18.0	659	410	E
	LT285/75 R 16 126/123S	T431878	51.8	7.5-9	8.0	32.8	11.3	18.0	634	394	E
	LT265/70 R 16 121/118S	T431884	47.4	7-8.5	8.0	30.6	10.7	18.0	681	423	E
17	LT235/80 R 17 120/117S	T431886	45.2	6-7.5	6.5	31.8	9.3	18.0	655	407	E
	LT245/75 R 17 121/118S	T431888	46.3	6.5-7.5	7.0	31.5	9.8	18.0	659	410	E
	LT285/75 R 17 121/118S	T432435	54.0	7.5-9.5	8.0	33.9	11.3	18.0	615	382	E
	LT245/70 R 17 119/116S	T431891	45.2	6.5-8	7.0	30.5	9.8	18.0	681	423	E
	LT265/70 R 17 121/118S	T431894	50.7	7-8.5	8.0	31.6	10.7	18.0	659	410	E
	LT275/70 R 17 121/118S	T431895	50.7	7-8.5	8.0	32.2	11.0	18.0	647	402	E
	LT285/70 R 17 121/118S	T431897	52.9	7.5-9	8.5	32.8	11.5	18.0	634	394	E
	LT315/70 R 17 121/118S	T431898	59.5	8-11	9.5	34.4	12.7	18.0	604	375	F
	35x12.50 R 17 LT 121R	T432439	61.7	8.5-11	10.0	34.5	12.5	18.0	604	375	E
18	LT285/75 R 18 129/126S	T432436	56.2	7.5-9.5	8.0	34.8	11.3	18.0	597	371	E
	LT265/70 R 18 124/121S	T431904	52.9	7-9	8.0	32.6	10.7	18.0	638	396	E
	LT275/70 R 18 125/122S	T431905	54.0	7-8.5	8.0	33.2	11.0	18.0	626	389	E
	LT295/70 R 18 129/126S	T431906	58.4	7.5-10	8.5	34.3	11.8	18.0	607	377	E
	LT275/65 R 18 123/120S	T431909	52.9	7.5-9	8.0	32.1	11.0	18.0	647	402	E
	LT285/65 R 18 125/122S	T431910	52.9	8-10	8.5	32.6	11.5	18.0	638	396	E
	35x12.50 R 18 LT 128R	T431912	61.7	8.5-11	10.0	34.5	12.5	18.0	604	375	F
20	LT275/65 R 20 126/123S	T431913	56.2	7.5-9.5	8.0	34.1	11.0	18.0	611	380	E
	LT285/65 R 20 127/124S	T432437	57.3	8-10	8.5	34.6	11.5	18.0	600	373	E
	LT265/60 R 20 121/118S	T431914	52.9	7.5-9.5	8.0	32.5	10.7	18.0	638	396	E
	LT275/60 R 20 123/120S	T431916	55.1	7.5-9.5	8.0	33.0	11.0	18.0	630	392	E
	LT285/60 R 20 125/122S	T431917	57.3	8-10	8.5	33.5	11.5	18.0	622	387	E
	LT295/60 R 20 126/123S	T432438	57.3	8-10	8.5	33.9	11.8	18.0	615	382	E
	LT275/55 R 20 120/117S	T431919	52.9	7.5-9.5	8.5	31.9	11.2	18.0	651	404	E
	LT285/55 R 20 122/119S	T431920	54.0	8-10	9.0	32.4	11.7	18.0	643	399	E
	LT305/55 R 20 125/122S	T431921	58.4	8.5-11	9.5	33.2	12.4	18.0	626	389	F
	35x12.50 R 20 LT 125R	T431923	61.7	8.5-11	10.0	34.5	12.5	18.0	604	375	F

*The Nokian Tyres 30-Day Satisfaction Guarantee and Nokian Tyres Pothole Protection excludes tires used in commercial applications.

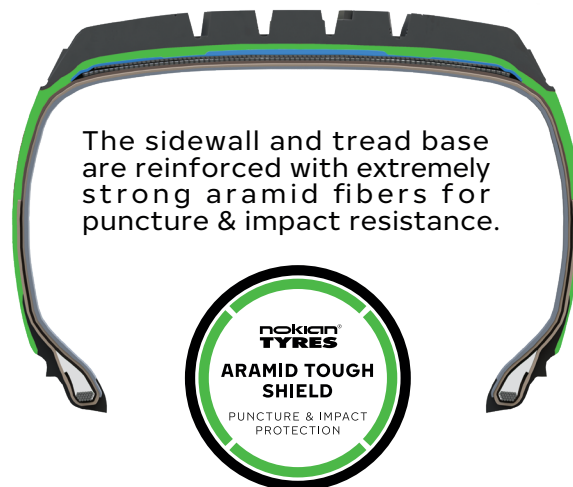

The sidewall and tread base are reinforced with extremely strong aramid fibers for puncture & impact resistance.

GREEN AREA INDICATES WHERE THE ARAMID FIBERS HAVE BEEN ADDED.